

PCT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C. 20231
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 14 September 2000 (14.09.00)	
International application No. PCT/GB00/00548	Applicant's or agent's file reference A25866 WO
International filing date (day/month/year) 16 February 2000 (16.02.00)	Priority date (day/month/year) 17 February 1999 (17.02.99)
Applicant RUSS, Martin et al	

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

15 June 2000 (15.06.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Juan Cruz Telephone No.: (41-22) 338.83.38
---	---

BEST AVAILABLE COPY

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference A25866 WO	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/GB00/00548	International filing date (day/month/year) 16/02/2000	Priority date (day/month/year) 17/02/1999
International Patent Classification (IPC) or national classification and IPC G06F17/22		
Applicant BRITISH TELECOMMUNICATIONS PLC et al		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 7 sheets, including this cover sheet.

- ☐ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☒ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 15/06/2000	Date of completion of this report 28.03.2001
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Barraco, G Telephone No. +49 89 2399 2172 

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00548

I. Basis of the report

1. This report has been drawn on the basis of *(substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments (Rules 70.16 and 70.17).):*

Description, pages:

1-28 as originally filed

Claims, No.:

1-22 as originally filed

Drawings, sheets:

1/9-9/9 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00548

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:

☐ the entire international application.

☒ claims Nos. 18-22.

because:

☐ the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):

☒ the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 18-22 are so unclear that no meaningful opinion could be formed (*specify*):
see separate sheet

☐ the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.

☐ no international search report has been established for the said claims Nos. .

2. A meaningful international preliminary examination report cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:

☐ the written form has not been furnished or does not comply with the standard.

☐ the computer readable form has not been furnished or does not comply with the standard.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N) Yes: Claims 1-17

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/00548

	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-17
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-17
	No:	Claims	

2. Citations and explanations
see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:
see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

Re Item III

Non establishment of opinion with regard to novelty, inventive step and industrial applicability

1. When considering the extent of the clarity objections concerning claims 18 to 22 (see Item VIII (point 7.2) below), this Authority does not consider feasible to perform a complete substantive examination of their subject-matter with respect of the requirements of novelty, inventive step and industrial application as set out in Article 33(2), (3) and (4) PCT.

Re Item V

Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

2. The various definitions of the invention given in independent claims 1, 18, 19 and 22 are such that the claims as a whole are not clear and concise, contrary to Article 6 PCT. The claims should be recast to include only the minimum necessary number of independent claims in any one category, with dependent claims as appropriate (Rule 6.4(a)-(c) PCT).

In the present case it is considered appropriate to use only one independent claim in any category, with dependencies of claims clearly defined, see in this regard also Rule 6.4 PCT.

Insofar as the present text of claim 1 can be understood (see point 7.1 below) the subject-matter of claim 1, when interpreted on the light of description appears to be directed to a method for producing a web site making use of a computer with an operating system which manages files arranged into a hierarchy of directories consisting in allowing the user by means of the file viewer of the operating system to set up, to configure and to edit a hierarchical structure of files corresponding to the structure of the contents in the web site and then allowing a conversion program to run in order to automatically transfer (convert) the file content structure into corresponding hypermedia linked web site.

This appears to be the most probable interpretation of claim 1.

3. It appears that the above method when appropriately circumstantiated and worded in a claim drafted according to Rule 6.3 PCT, i.e. with a preamble including the features known from the prior art, in particular at least, the hierarchical structure (media tree

structure), transferring operation, cf. D1: WO-98/10356: from page 9, line 18 to page 13, line 5, could be considered new and involving inventive step, cf. Article 33(2) and (3); with respect to the available prior art.

4. The subject-matter of appropriately reworded dependent claims 2 to 17 could also be considered inventive.

Re Item VII

Certain defects in the international application

5. The document D1 is not identified in the description and the relevant background art disclosed therein is not briefly discussed, as required by Rule 5.1(A)(ii) PCT.

If the applicant is aware of some more documents reflecting the prior art which is described on pages 1 to 4, then the document should be identified in the description, Rule 5.1(A)(ii) PCT.

The independent claim(s) are not drafted in the two-part form as required by Rule 6.3(B) PCT, whereby the features known from the prior art, cf. in particular D1, are placed in the preamble, cf. for example above - hierarchical structure transferring feature.

R Item VIII

Certain observations on the international application

6. The claims are not clear and concise, as required by Article 6 PCT in the following respect:
 - 6.1 In claim 4 the expression "to establish a hierarchical structure", (line 8) is not clear: it should be better circumstantiated i.e. expanded/detailed.
 - 6.2 In claims 18 and 19 the expression "computer configuration" is too vague and unclear the term configuration is, in effect, used again in the same claim and in other claims with different and misleading (not univocal) meanings.

In claims 19 and 22, also, is not stated with which modalities and when are the "program module" and the "template library" used.

- 6.3 Reference signs in parentheses have not been inserted in the claims to increase their intelligibility, Rule 6.2(B) PCT. This applies to both the preamble and characterising portion.

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference A25866 W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/GB 00/ 00548	International filing date (day/month/year) 16/02/2000	(Earliest) Priority Date (day/month/year) 17/02/1999
Applicant BRITISH TELECOMMUNICATIONS PLC et al		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

3

☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

GB 00/00548

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G06F17/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	<p>✓ WO 98 10356 A (DESIGN INTELLIGENCE INC) 12 March 1998 (1998-03-12)</p> <p>page 9, line 18 -page 13, line 5 page 25, line 34 -page 29, line 16 page 64, line 8 -page 66, line 28 figure 38</p>	<p>1-4, 14-21 5-13,22</p>
A	<p>✓ BLYTH D S: "WEB PAGE DESIGN FOR HTML" INTERNATIONAL PROFESSIONAL COMMUNICATION CONFERENCE (IPCC),US,NEW YORK, IEEE,1996, pages 89-103, XP000691597 ISBN: 0-7803-3690-9 page 89-103</p>	<p>1-22</p>
P,X	<p>✓ US 5 956 736 A (HANSON MICHAEL ROBERT ET AL) 21 September 1999 (1999-09-21) column 5, line 37 -column 9, line 61</p>	<p>1-22</p>



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

28 March 2000

Date of mailing of the international search report

05/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bowler, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

GB 00/00548


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9810356 A	12-03-1998	US 5956737 A	21-09-1999
		US 5895476 A	20-04-1999
		US 5903902 A	11-05-1999
		US 5895477 A	20-04-1999
		AU 4334197 A	26-03-1998
		EP 0925542 A	30-06-1999
<hr/>			
US 5956736 A	21-09-1999	NONE	
<hr/>			



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G06F 17/22		A1	(11) International Publication Number: WO 00/49520
			(43) International Publication Date: 24 August 2000 (24.08.00)
(21) International Application Number: PCT/GB00/00548		(74) Agent: GARRISON, Christopher, Sinclair; BT Group Legal Services, Intellectual Property Dept., Holborn Centre, 8th floor, 120 Holborn, London EC1N 2TE (GB).	
(22) International Filing Date: 16 February 2000 (16.02.00)			
(30) Priority Data: 9903641.0 ✓ 17 February 1999 (17.02.99) GB 99304800.8 ✓ 18 June 1999 (18.06.99) EP		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(71) Applicant (for all designated States except US): BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): RUSS, Martin [GB/GB]; 71 Farriers Close, Martlesham Heath, Ipswich IP5 3SN (GB). WILLIS, Ben [GB/GB]; 8 Houghton Place, Ipswich, Suffolk IP4 5UX (GB). KEGEL, Ian, Christopher [GB/GB]; 27 Banyard Close, Kesgrave, Ipswich, Suffolk IP5 2FR (GB). BAGLEY, Mark [GB/GB]; Fairfield, Grove Hill, Belstead, Ipswich, Suffolk IP8 3LS (GB). BERRY, Rachel [GB/GB]; 59 Goodby Road, Moseley, Birmingham B13 8RP (GB).		Published With international search report.	

(54) Title: CREATING HYPERMEDIA CONTENT FOR A WEB SITE

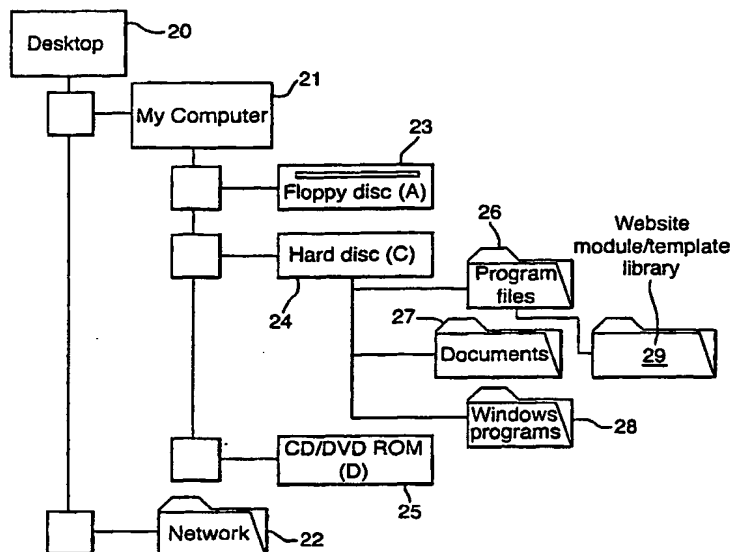

(57) Abstract

Hypermedia content for a web site is created making use of a computer configuration such as a personal computer (PC1a) that has an operating system (14) in which files are configurable in a hierarchical structure and the operating system is provided with a viewer (17) that provides a visual display of the hierarchical structure and an indication of the file content. The viewer (17) for the operating system is used (step S1) to establish a hierarchical structure of files (Fig. 5) corresponding to content for the web site, and then a conversion program module (29) is run (step S2) to convert the file contents into hypermedia for the web site with hyperlinks therein corresponding to the file structure. After locally previewing the hypermedia with a browser (50) the content is uploaded (step S3) to a server to establish the web site.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Creating hypermedia content for a web site

Description

This invention relates to creating hypermedia content for a web site.

5 It is known that data in the form of hypermedia such as hypertext, is often written in the hypertext language HTML and arranged in web pages that are provided by a server connected through a network to a client. The client may comprise a personal computer or other processing device capable of presenting the data
10 retrieved from the server to a user. The network may comprise a local area network (LAN), a wide area network (WAN) or may comprise the Internet. For example, the World Wide Web comprises many servers connected over the Internet in a web, which have addresses in the form of universal resource locators (URL).

15 The hypertext information is arranged in web pages which include hyperlinks to allow the user to establish a link to another web page, which may be located on the same or a different server, the routing to the document being achieved by use of a URL in the web page at the hyperlink.

20 Web clients typically access the hypermedia information using a browser. An overview of the World Wide Web and HTML is given in Chapter 1 of "HTML 3.2 and CGI Unleashed" J. December and M. Ginsberg 1996 (ISBN 1-57521-177-7). Although HTML is usually used to prepare web pages, they can also be created in other markup languages.

25 Web pages can display text, graphics and files of other descriptions such as video images, animated graphics and audio samples. Hypermedia have the significant advantage that the client can rapidly transfer viewing from one document to another by using a mouse to click on hyperlinks in the document, permitting the user to
30 transfer from one web site to another, which may be at different physical locations.

As well known in the art, markup languages such as HTML define the location and format of hypermedia included in the web page. For example, the page may include

text in a particular font and at a particular location defined by HTML markers on the page. In order to create a web site, individual web pages may be written by a programmer in HTML but this is a time consuming exercise and a number of alternative approaches have been implemented hitherto.

5 HTML converter programs are available which translate documents into HTML. For example, a document prepared in the wordprocessor format can be converted into HTML by the use of such a conversion program. Sometimes, templates are used which define the layout of a page in HTML, into which the user can insert text
10 or other data such as images, in order to create a web page with a particular look and feel.

Often HTML editors are used to create and edit hypertext. Many editors provide a what-you-see-is-what-you-get (WYSIWYG) way to create and edit HTML files,
15 without actually having to type the individual HTML marker tags which define the position and style of item in each web page. Such HTML editors comprise an application program software package which needs to be loaded onto the computer. The editor establishes a database of HTML files that can be edited and amended using a viewer. The relationship between the individual pages of the web can be
20 displayed graphically.

One example of an HTML editor is FrontPage by Microsoft Corporation. This provides a viewer which allows features such as hyperlinks and graphics to be dropped onto a web page without having to write lines of code in HTML. The
25 editor is provided with a database for storing the web pages and the links between them produced when using the viewer. When a web site has been created using FrontPage, the resulting HTML code can be uploaded to a server from the editor's database. Other HTML editors include PageMill by Adobe Corporation, for use with Macintosh hardware and Webmaster Pro from HeyerTech Inc.

30 Although HTML editors such as FrontPage, enable high quality web sites to be produced in HTML, the use of the editor requires a certain amount of training and the editor needs to be purchased as an additional package which is loaded onto the

computer as an application program, to provide the viewer, the database and other functionality. Such editors enable relatively large web sites to be created and maintained effectively but they are not particularly suited to creating and editing relatively small web sites, making them unattractive for example, to users who wish
5 to establish a personal web site or small business users who wish to establish a relatively small web site.

According to the invention there is provided a method of creating hypermedia content for a web site, making use of a computer configuration that has an
10 operating system wherein files are configurable in a hierarchical structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, the method being characterised by using the viewer of the operating system to establish a hierarchical structure of files corresponding to content for the web site, and running a
15 conversion program module to convert the file contents into hypermedia for the web site with hyperlinks therein corresponding to the file structure.

The hierarchical file structure may include file folders and at least one of the folders may contain a template file defining a predetermined configuration for hypermedia
20 at a node in the web site corresponding to the folder, and the conversion program module produces a web page corresponding to the template for the node.

The template may be selected from a library thereof, for example by using the file viewer, to place the selected template in a selected folder.
25

Thus, according to the invention, instead of using a bespoke viewer and associated database in an application program overlying the operating system, the invention makes use of the viewer provided with the operating system and a conversion program module converts the file content into corresponding hypermedia.

30 Accordingly, a person with limited knowledge of HTML, and with no knowledge of specialised HTML editors, can produce a web site by establishing a hierarchical file structure using the operating system viewer and the program module automatically converts the files into corresponding, linked web pages.

The invention also includes a conversion program module operable to create hypermedia content for a web site, by running on a computer configuration that has an operating system wherein files are selectively configurable in a hierarchical
5 structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, characterised by the module being operable to convert a hierarchical configuration of files corresponding to content for the web site previously assembled in the operating system using the viewer, into hypermedia for the web site with hyperlinks
10 therein corresponding to the file structure.

The invention further includes a library of templates for use in the aforesaid method

In order that the invention may be more fully understood an embodiment thereof
15 will now be described by way of example, with reference to the accompanying drawings in which:

Figure 1 is a schematic illustration of client and server workstations connected in a network;

Figure 2 is a schematic illustration of the software running on workstation PC 1a of
20 Figure 1;

Figure 3 is a schematic illustration of a hierarchical file structure provided by the operating system shown in Figure 2;

Figure 4 is a schematic flow diagram of the steps involved in generating hypermedia for a web site on PC 1a, in accordance with the invention;

25 Figure 5 is a screen shot of the hierarchical file structure for the web site when viewed with a file viewer;

Figure 6 is a schematic illustration of a node page of the web site and viewed in a browser, together with a corresponding partial view of the file structure when viewed in the file viewer as per Figure 5;

30 Figure 7 is a schematic illustration of the home page of the web site when viewed in the web browser;

Figure 8 is a schematic illustration of a file classification process which occurs at a node when producing hypermedia for the web site from the file structure;

Figure 9 is a schematic illustration of the process carried out to apply a node template to a folder of the file structure;

Figure 10 illustrates how a text document template is applied to individual files in the folder;

5 Figure 11 illustrates how a plugin in the template is processed in order to create a HTML corresponding to the template;

Figure 12 illustrates how a graphics file is located and inserted,

Figure 13 illustrates in more detail how a plugin for a document file is processed;

Figure 14 is a process diagram for link templates; and

10 Figure 15 is a schematic flow diagram for uploading the hypermedia produced by the conversion program to a specified site in the network.

Figure 1 illustrates a conventional network in which a plurality of client workstations in the form of personal computers (PCs) 1a, 1b, 1c are connected by
15 means of a network 2 to a server 3 which may also be a PC or a dedicated server, as well known in the art. The network 2 may comprise the world-wide web (WWW) a LAN or a WAN.

The basic components of PC 1a are shown in schematic block diagrammatic form.
20 PC 1a comprises a screen 4 such as a cathode ray tube or plasma display, keyboard 5, mouse 6, a storage device 7, typically a floppy disc drive 7a, a hard disc 7b, a CD or DVD ROM drive 7c, processor 8, RAM 9, ROM 10 and network connections 11 such as a modem or ISDN interface or, if the network is a local network a suitable network card. The aforementioned components are interconnected by a common
25 bus 12 as well known in the art.

A schematic illustration of the software running on the PC is shown in Figure 2. As well known in the art, a basic input output system (BIOS) 13 provides information interchange between the various components of the PC 1a shown in Figure 1. An
30 operating system 14 controls operation of the BIOS 13. The operating system includes a file handling system 15 and a graphical user interface (GUI) 16. An example of such an operating system is Microsoft™ Windows e.g. Windows 98™.

As well known in the art, programs and data are arranged in files, which are grouped in directories referred to herein as folders. The file handling system 15 of the operating system 14 allows files to be organised in a hierarchical structure. This structure can be viewed using a file viewer 17 associated with the operating system 14. The file viewer 17 in one example comprises Microsoft Windows Explorer that is supplied with the Windows 98™ operating system.

The operating system 14 allows application programs 18 to be run on the computer. As well known in the art, the application programs can take a multiplicity of different forms. For example, the application programs may include a wordprocessor such as Microsoft Word™ or programs written by other software suppliers. Also, spreadsheet programs such as Microsoft Excel™ and presentation programs such as Microsoft Powerpoint™ can be run as application programs 18. The application programs can also include a web browser such as Microsoft Internet Explorer 5 or Netscape Navigator. As known in the art, these browsers are used to display hypertext media derived from web sites e.g. from web sites at the server 3 shown in Figure 1.

A schematic illustration of a hierarchical folder and file structure for PC 1a is shown in Figure 3. At the top of the hierarchical structure is a folder 20 labelled "Desktop". This provides an overview of the files that are accessible by the PC 1a. Beneath the top of the hierarchical structure is a lower level of folders or subfolders, shown to the right of folder 20, comprising folders 21 and 22. Folder 21 is referenced "My Computer" and contains all of the files held locally on the PC 1a. Folder 22 includes details of the folders available through the network 2 shown in Figure 1.

The next lower level in the hierarchical structure comprises subfolders 23, 24 and 25. The folder 23 comprises files held on a floppy disk when inserted into the floppy disk drive 7a of Figure 1. Folder 24 is a repository for files held on the hard disk 7b shown in Figure 1 and folder 25 is a repository for files available through the CD/DVD ROM drive 7c of Figure 1.

With reference to the folder 24, the next lower level comprises folders 26, 27 and 28 which respectively contain program files, documents and programs for running Microsoft Windows™. Each of the folders 26, 27 and 28 itself contains subfolders and each of the subfolders contains individual files which may comprise programs or documents or other data.

Program file folder 26 is shown to have a subfolder 29 which contains files for a web site conversion program module according to the invention, and an associated template library as explained in more detail hereinafter.

This general, hierarchical structure of folders is well known in the art and the configuration shown in Figure 3 comprises a typical example of the format used in Microsoft Windows™. The usual file viewer 17 of Figure 2 enables a display such as shown in Figure 3 to be produced of the folders and file structure. As well known in the art, file viewers such as Microsoft Windows™ Explorer allow file management to be achieved, by permitting files to be dragged and dropped into the folders shown in Figure 3. The file viewer also allows folders to be opened and named, and provided with subfolders according to a desired hierarchical structure, as well known in the art.

In accordance with the invention, the file viewer 17 is used to establish an hierarchical file structure corresponding to web pages for a web site such that the file content can be converted into hypermedia for the web site with hyperlinks corresponding to the file structure. An overview of the web creation process is given in Figure 4. At step S1, the hierarchical file structure is set up using the viewer 17. Then, at step S2, a conversion program module is run, which converts the file structure established in step S1 into hypermedia, with web pages corresponding to the files of the file structure and links between them corresponding to the hierarchy of the file structure. At step S3, the hypermedia produced by step S2 is uploaded to a server to provide a web site. In the present example, the hypermedia is uploaded to server 3 shown in Figure 1 although it will be appreciated that the web site can be established at any convenient server location including PC 1a itself.

Once uploaded, the web site can be viewed using a web browser as previously described.

5 **Overview of file structure and web site**

In order to explain the relationship between the file structure established by the viewer 17 and the corresponding web pages, an example will now be given of a web site entitled "Lemon Catering". The web site is configured to offer menus for different meals to a customer, who can use the web site to order a meal selected
10 from the menus. Referring to Figure 5, for step S1, (Figure 4) the file structure for the Lemon Catering web site is set up using the file viewer 17, in this example Microsoft Windows™ Explorer. The hierarchical relationship of the folders that form the basis of the web site, is shown in Figure 5. As well known in the art, the Windows Explorer viewer 17 includes a left hand window 30 that shows the
15 hierarchical folder structure, and a right hand window 31 that shows the individual files included within a particular folder. In the usual way, the files within a particular folder are revealed by clicking on the folder concerned in the left hand window 30 with the mouse, so as to open the folder such that its files are displayed individually in the right hand window 31. As well known in the art, Microsoft
20 Windows Explorer is provided with a drop down menu (not shown) under the button entitled "File", referenced 32, which allows the user to create, edit and delete folders and subfolders so as to create the hierarchical file structure for the web site. This process is well known *per se* to those skilled in the art. It will also be understood that content files for the individual folders can readily be dragged and
25 dropped using the mouse, into individual folders of the hierarchical folder structure shown in window 30. The dragged and dropped files can be obtained from local folders or sub-folders for "My Computer" 21 or from sub-folders for the Network folder 22, or even as downloads from other locations.

30 The hierarchical folder structure for the "Lemon Catering" web site will now be considered in more detail. It comprises a root folder 33 named "Lemon Source" with the following sub-folders on the next lower level of the hierarchy: "About Us" 34, "Contacts" 35, "Products" 36 and "Services" 37. For the next lower level of the

hierarchy, the folder "Products" 36 has associated sub-folders "Meals" 38 and "Snacks" 39. . For the next lower level of the hierarchy, the folder "Meals" 38 has associated sub-folders "Breakfast" 40, "Evening Meal" 41 and "Lunch" 42.

5 Each folder constitutes a node in the web site and as will be explained in detail hereinafter, gives rise to an HTML web page corresponding to the node, with links to other ones (HTML web pages) of the nodes corresponding to the file hierarchy. Thus the top level folder , referred to herein as the 'root' folder "Lemon Source" 33 corresponds to the Home Page of the web site, and has hyperlinks to node pages
10 corresponding to folders 35 - 39, which in turn have hyperlinks to node pages corresponding to the sub-folders according to the hierarchy shown in Figure 5.

One or more of the folders may contain text files which each provide an HTML web page that has a hyperlink to the node page corresponding to the folder
15 containing the text file. By way of example, the folder "Meals" 38 in Figure 5 is shown open and its contents are shown in the right hand window 31. The folder contents include a word processor text file 43 "Booking Form for all Menus.doc, and text files 44, 45 and 46 corresponding to the text of individual menus. The folder 38 also includes a text file 47 referred to as a comment file with a file suffix
20 ".cmt" with text for inclusion on the node page, and a graphics file 48 for inclusion on the node page, as will be explained later.

Figure 6 is a view of the node web page 49 that is produced from the "Meals" folder 38 when viewed with a web browser. In this example the Microsoft Internet
25 Explorer™ web browser is utilised although others may be used such as the Netscape Navigator™ . As will be explained in more detail hereinafter, an HTML template is applied to the contents of folder 38 so as to produce a corresponding node web page. The browser has a viewing window 50 which displays the web page corresponding to folder 38.

30

The web page 49 includes hyperlinks *hl* corresponding to the hierarchical folder structure. As previously explained, the folder 38 contains files 43-46 (Figure 5) and, in the node web page 49 of Figure 6, hyperlinks *hl43-hl46* are provided to web pages

corresponding to the document files 43-46. Thus the hyperlinks *hl43-hl46* can be considered as document links.

The web page 49 also includes hyperlinks which permit the user to move through the hierarchical folder structure. Hyperlink *hl 33* labelled "Home" provides access to the Home Page of the web site, which in this example corresponds to root folder 33 "Lemon Source" shown in the window 30 of the file viewer 17.

The web page 49 further includes hyperlink *hl36* labelled "Back" which provides access to the web page corresponding to the next node up in the hierarchical file structure, corresponding to the "Products" folder 36 shown in Figure 5. In terms of the folder hierarchy, the "Products" folder 36 can be considered as a parent for the "Meals" folder 38 and so the hyperlink *hl36* can be considered as a parent link.

Referring to the window 30 in Figure 5, it will be seen that the "Meals" folder 38 is at one level up in the hierarchical folder structure from the folders 40, 41 and 42, entitled "Breakfast", "Evening Meal" and "Lunch". These folders can be considered in terms of the hierarchy as children in relation to the "Meals" folder 38. In the displayed web page 49 of Figure 6, hyperlinks *hl40*, *hl41* and *hl42* are provided to web pages corresponding to the folders 41, 42 and 43 and can be considered as child links.

From Figure 5, it can be seen that the "Meals" folder 38 and the Snacks" folder 39 share a common parent folder "Products" 36 and a hyperlink to the so-called cousin folder 39 is provided in web page 49 in Figure 6 by hyperlink *hl39*, which can be considered as a cousin link.

Also, as shown in Figure 6, a hyperlink *hl51* which enables the user to e-mail comments in respect of the web page, is provided. The operation of this hyperlink is conventional and will not be described further herein.

It will therefore be understood that the user can navigate through the hierarchical structure of the web site by using the links displayed on each web page, the links

being set up in accordance with the hierarchical file structure established using the file viewer 17 associated with the operating system which, in this example, comprises Microsoft Windows Explorer.

5 Template files

The “look and feel” of the web pages that make up the web site is determined by template files placed in the file structure. The template files are designed to provide a quick and easy way of applying a uniform look to pages of the web site and template files may be provided in a library so that the user can select a particular
10 look for the web site. As previously explained, the web site is arranged with the links corresponding to the hierarchical structure of the files, but the look of the pages corresponds to the templates placed in the file structure. The content of the pages is thus separate from the look of the pages, and the links are also separate, being derived from the file structure.

15 Thus, the folders in the hierarchical file structure can be considered as nodes and a template is provided to give each node a particular layout and appearance.

Furthermore, a template is provided for document files so that these can be given an individual, common appearance different from the node.

20 The template files comprise a template for the Home Page of the web site, a node template that can be used for each folder shown in the window 30 of Figure 5 and a document template for individual document files corresponding to files 43-46 in window 31 of Figure 5.

25 The template files are pre-written in HTML and make use of plugins, as will be described in detail later. The user can choose a particular template file configuration from the library and the template files are dragged and dropped using viewer 17 into the Home Page folder namely “Lemon Source” folder 33 shown in Figure 5. In this example, the template files have a suffix “.tpl” and an example of
30 templates for use at the home page, folders and documents is shown below.

An example of the HTML for the Home page template lemon.tpl is as follows:

```
<HTML>  
<HEAD>
```



```

    <TITLE>Welcome to Lemon Catering</TITLE>

</HEAD>
5  <!-- Globals ----->

    <BODY BGCOLOR="#FFFFFF" LINK="#000000" VLINK="#777777" >
    <BASEFONT SIZE=3>
10  <CENTER>
    <TABLE COLS=1 BGCOLOR="#FFFFFF" BORDER="0" CELLSPACING="0"
    CELLPADDING="0" width=100%>
    <TR>
15  <TD >
        <P>
        <CENTER>
            <IMG SRC="Logo.gif" BORDER=0 ALT="logo">
            <BR>
20  <FONT FACE=Arial COLOR=#000000 size=2
    ><I>!!Comment!!</I></FONT>
        <P>
            <FONT FACE=Arial COLOR=#000000 size =6 ><B>!!ChildLinks
plain horiz!!</B></FONT>.
25  </CENTER>
        </TD>
    </TR>
    </TABLE>
    </CENTER>
30  </BODY>
    </HTML>

```

This corresponds to a home page layout as shown in Figure 7.

35 It will be seen that in the aforementioned template, an image file **Logo.gif** is included. In the existing templates e.g. in the template library, the convention adopted is that the file contains a non-meaningful object and that the templates are configured so that the user can replace the files by bespoke files, for example a company logo or other image information pertinent to the web site concerned. In 40 the example shown in Figure 7, the user has replaced the original non-meaningful **Logo.gif** file by a bespoke lemon logo image file. These changes can be easily made by the user, by dragging, dropping and renaming a suitable image file into the "Lemon Source" folder 33.

45 HTML corresponding to a template **node.tpl**, which is applied to the node pages, is as follows:

```

<HTML>
<HEAD>

```

```

        <TITLE>!!Title node!!</TITLE>

5  </HEAD>

    <!-- Globals ----->

    <BODY BGCOLOR="#FFFFFF" LINK="#000000" VLINK="#777777" >
10  <BASEFONT SIZE=3>

    <BR>
    <BR>
    <CENTER>

15  <TABLE COLS=3 BGCOLOR="#FFFFFF" BORDER="0" CELLSPACING="0"
    CELLPADDING="0" width=100%>
    <TR>
    <TD align="center">
20      <FONT FACE=Arial COLOR=#000000 size =4 ><B>!!HomeLink bracket
    horiz!!</B></FONT>
    </TD>
    <TD align="center">
    <FONT FACE=Arial COLOR=#000000 size =4 ><B>!!ParentLink back
25  horiz!!</B></FONT>
    </TD>
    <TD align="center">
    <FONT FACE=Arial COLOR=#000000 size =4
30  ><B>!!Feedback!!</B></FONT>
    </TD>
    </TABLE>

    <HR>

35  <TABLE COLS=2 BGCOLOR="#FFFFFF" BORDER="0" CELLSPACING="0"
    CELLPADDING="4" width=100%>
    <TR>
        <TD ALIGN=top >
            !!DocumentImage!!
40      <TD>
        <TD ALIGN=top >
            <P><FONT FACE=Arial COLOR=#000000
    size=4><B>!!Comment!!</B></FONT>
            </P>
45      <P>
            <FONT FACE=Arial COLOR=#000000 size=4>!!DocumentLinks
    plain vert alphaup none no no no all!!</FONT>
            </P>
            <FONT FACE=Arial COLOR=#000000 size=4><B>For more details,
50  see :</B></FONT>
            <BR><UL>
            <FONT FACE=Arial COLOR=#000000 size=4>!!ChildLinks
    bulletlist vert!!</FONT>
            </UL>
55      </TD>
    </TR>
    </TABLE>

```

```

5  <HR>
    <TABLE BGCOLOR="#FFFFFF" BORDER="0" CELSPACING="0" CELLPADDING="4"
      width=100%>
    <TR>
      !!CousinLinks bottom horiz yes!!
    </TR>
    </TABLE>

10 </CENTER>

    </BODY>
    </HTML>

```

This corresponds to the node page layout as shown in Figure 6.

15 An example of a template `document.tpl` that can be used for the document files 43-46 is as follows:

```

<HTML>
<HEAD>
    <TITLE>!!Title document!!</TITLE>
</HEAD>
    <!-- Globals ----->
<BODY BGCOLOR="#FFFFFF" LINK="#000000" VLINK="#777777" >
<BASEFONT SIZE=3>
    <BR>
    <BR>
    <CENTER>
    <TABLE COLS=1 BGCOLOR="#FFFFFF" BORDER="0" CELLSPACING="0"
        CELLPADDING="0" width=100%>
    <TR>
    <TD ALIGN=top >
        !!DocumentImage!!
    <TD>
    <TD ALIGN=top >
        <FONT FACE=Arial COLOR=#000000 size=6
        ><B>!!Comment!!</B></FONT>
        <FONT FACE=Arial COLOR=#000000 size=6 ><B>!!DocumentFile none
no!!</B></FONT>
    </TD>
    </TR>
    <TR>
    <TD COLSPAN=2 ALIGN=top >
        <CENTER>
            <FONT FACE=Arial COLOR=#000000 size =4 ><B>!!HomeLink
plain vert!!</B></FONT>
                &nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~
            <FONT FACE=Arial COLOR=#000000 size =4 ><B>!!ParentLink
back vert!!</B></FONT>

```

- 15 -

```

        &nbsp; &nbsp; &nbsp; &nbsp;
        <FONT FACE=Arial COLOR=#000000 size =4 ><B>!!CousinLinks
plain vert yes!!</B></FONT>
5         </CENTER>
          <BR>
          </TD>
</TR>
</TABLE>
</CENTER>
10 </BODY>
    </HTML>

```

Although not shown specifically in the drawings, the look and feel of a web page produced using the document template **document.tpl** is consistent with that of the Home page and node pages produced by the templates **lemon.tpl** and **node.tpl**.

The aforementioned three template files are provided in the root "Lemon Source" folder 33 and act to provide a default look for the entire web site but can be selectively overridden by the user if it is desired to give web pages corresponding to individual nodes or files a different appearance. If a further template is placed in one of the folders, then the further template will then be used to provide the default look for that folder and folders or documents below it in the file structure. This can be achieved, for example for a node, by including an individual node template in the corresponding folder, which will override the hierarchy provided by the node template in the Home Page "Lemon Source" folder 33. Thus, for a user with minimal knowledge of HTML, templates from the template library in folder 29 (Figure 3) provide a quick and easy way of applying a common style to a web site, with the template being selected by the user from the library and dragged and dropped into the root folder of the web site – folder 33 in this example. However, more sophisticated users can adapt and modify individual parts of the web site as desired e.g. by placing different template files in individual folders of the file structure. The template may be individually written in HTML, selected by the user from a library, or downloaded from a remote server, depending on the skill level of the user.

Conversion program module

As previously described, the conversion program module, which converts the various files and folders shown in window 30 into hypermedia, resides in program subfolder 29 shown in Figure 3.

When the user is satisfied that the hierarchical file structure displayed by the file viewer 17, is satisfactory, the program module is run to convert the file structure into corresponding hypermedia (step S2 of Figure 4). This will now be described in more detail. The program module includes a conventional tree creeper which moves hierarchically downwardly through the file structure, folder by folder, converting the folder contents into corresponding hypermedia, making use of the previously described templates. An example of a suitable tree creeper is given in computer programming algorithm literature, for example:

[<http://www.cs.hope.edu/~alanim/ccaa/tree.html>] . Other examples of searching routines which can be used for this purpose are described in "Handbook of Algorithms and Data Structures in Pascal and C" Gaston Gonnet, Ricardo Baeza-Yates Addison Wesley; ISBN: 0201416077, Chapter 3 : Searching Algorithms.

An overview of the process carried out for each folder will now be described.

Referring to Figure 8, at step S2.1, all the files of the folder are identified and at step S2.2, classified according to their file suffixes. Files with the ".tpl" suffix are identified as templates for use in producing the individual web pages. These are shown schematically as block 51. Files which are to be uploaded without conversion to the web site are identified as block 52. For example, files which are in the Microsoft Powerpoint format or other application software files such as spreadsheets, can be loaded to the web site for use as subsequent downloads by users running local copies of the application program rather than browsing by means of a web browser. Text files with the .txt, .htm or .doc suffix are identified in block 53. These files are subsequently converted using the templates previously described, into HTML for the web site, as will be described in more detail hereinafter.

The various processes carried out at each folder or node will now be described in more detail. Referring to Figure 9, HTML for the node web page is produced using an aforementioned node template. As mentioned previously, the node template can be placed in the relevant folder by the user in order to achieve a particular look for the node concerned. If no node template has been inserted by the user, the node template for the next highest level is used, which can be considered as an “inheritance” of the template, and, if there is no template specified for the next higher level, the routine moves up the file structure so that if necessary, the node template held in the Home Page “Lemon Source” file 33 (Figure 6) is used. Thus, at step S2.3, a search for the node template file in the node concerned is carried out and, if it does not exist, at step S2.4 the search is carried out at a higher level in the file structure and the process is repeated if necessary at higher levels until a suitable node template is found. When the node template is found, it is then used to create HTML as shown at step S2.5. The HTML comprises in effect the menu page associated with the node or folder, of the type shown and described in relation to Figure 6, with a set of hyperlinks to child topics, its parent node and the Home Page, as specified by the template.

Figure 10 illustrates the process carried out to convert document text files (block 53 of Figure 8) into corresponding HTML for inclusion as web pages in the web site. At step S2.6, an individual file is reviewed from the list of files obtained at S2.1 (Figure 8). At step S2.7, the file is reviewed to determine whether it is a text document i.e. with a suffix .txt. If not, the next file is obtained at step S2.6. When .txt file is located, a corresponding document template is sought at step S2.8. As previously described, document templates document.tpl can be placed in a particular node (folder). If however no document template is provided, the process goes back up one level of the hierarchical file structure at step S2.10 to seek a corresponding document template and the process is repeated until an appropriate template is found. This provides a default template at a higher level in the file structure, which can be selectively overridden by the user in the event that a particular template is required at a particular node, or for a particular document. The overriding is achieved by the user placing a bespoke document template in the folder containing the document concerned.

The corresponding HTML is then created using the template, at step S2.9. As well known in the art, the creation of HTML is achieved by applying HTML tags from the template document to the text of the file obtained at step S2.6. Thus, the text is
 5 marked up so as to take up the attributes prescribed by the HTML tags.

It will be understood that corresponding routines for different text file types can be used. Thus a corresponding routine can be run for text documents produced in Microsoft Word™ with step S2.7 checking to see if the documents have a file suffix
 10 .doc signifying a Word text file.

Plugins

Plugins can be used in the HTML of each of the different types of templates in order to insert particular information into the corresponding web page. The plugins
 15 are identified in the HTML code by **!!xxx!!**. The instruction given within the exclamation marks causes data to be fetched and inserted in the relevant place in the web page produced by the template. Examples of plugins are set out in Table 1 below and examples of the use of such plugins is given hereinbefore in the HTML snippets corresponding to the templates **lemon.tpl**, **node.tpl** and **document.tpl**.

20

Table 1

!!Author!!		
Inserts text representing details of the web site's author, as optionally specified in an .ini configuration file.	(takes no parameters)	
!!ChildLinks <link> <dir>!!		
Inserts HTML code representing a list of links to the menu (node) URL for each sub-folder leading from the current folder	<link>	This specifies the HTML formatting which should be used with the link
	plain	creates a standard textual hyperlink.
	image	creates an image-based hyperlink, using an image of the same name as the destination folder.

	table	creates cells within a table containing one textual hyperlink in each cell (designed to easily create button bars). The table itself should be defined manually in the template file.
	tablewithimages	creates a table as above but uses image-base hyperlinks.
	...	any other entry specifies a link template which can contain any other desired HTML formatting.
	<dir>	This specifies the direction in which a list of links should run. This parameter will have no effect if there is only a single link to create.
	horiz	includes formatting to create a horizontal list
	vert	includes formatting to create a vertical list
!!Comment!!		
Inserts the full textual content of one or more comment files. <ul style="list-style-type: none">If used within a node template, this plugin will insert the contents of all files with the .cmt extension which do not have the same names as document files.If used within a document template, this plugin will insert the contents of the single .cmt file with the same name as that document. The plugin will add HTML paragraph formatting to the text content unless HTML formatting tags are already present.	(takes no parameters)	
!!CousinLinks <link> <dir> <exclude>!!		
Inserts HTML code representing a list of links to the menu (node) URL for all folders which have the same parent as the current folder	<link>	See above explanation.
	<dir>	See above explanation.
	<exclude>	This specifies whether the current folder (or document) should be included in the list being created.
	yes	omit the current folder (or document) from the list
	no	include the current folder (or document) in the list
!!CurrentDate <format>!!		
Inserts text representing the current system date.	<format>	This specifies the format in which the date should be included.
	digit	gives the date in a short format : 30/9/99

	text	gives the date in a longer format : Monday 30th September 1999
!!CurrentTime!!		
Inserts text representing the current system time. The time is given in the format : 12:30.	(takes no parameters)	
!!CurrentPath!!		
Inserts text representing the filing system path to the current document or folder. This is normally used to assist additional applications which may wish to modify a site.	(takes no parameters)	
!!DocumentFile <datetime> <summary>!!		
Inserts the textual content of a document file. The plugin will add HTML paragraph formatting to the text content unless HTML formatting tags are already present. This plugin will only produce output when placed inside a document template.	<datetime>	This specifies whether the date and/or time stamp of the file should be included before it's content.
	none	includes no date or time information
	dateonly	includes just the date in a long format : 30 September 1999
	timeonly	includes just the time in the format : 12:30
	datetime	includes a both the date and time in a long format : 30 September 1999 12:30:00 GMT
	<summary>	This specifies whether a Prosum summary of the document should be included instead of the full version.
	yes	include a summary
	no	include the full textual content
!!DocumentImage!!		
Inserts HTML code representing a graphical image. If used within a node template, this plugin will insert a reference to an image which has the same name as the current folder. If used within a document template, this plugin will insert a reference to an image which has the same name as the current document.	(takes no parameters)	
!!DocumentLinks <link> <dir> <sorttype> <datetime> <summary> <exclude> <recurse> <select>!!		
Inserts HTML code representing a list of links to document files of all types in the file structure below and including the current folder.	<link>	See above explanation.
	<dir>	See above explanation.
	<sorttype>	This specifies the order in which links should be listed.
	none	links are not sorted in any order.

	alphaup	links are arranged in alphabetical order according to the name of the document file.
	dateup	links are arranged in reverse chronological order (newest first) according to the time stamp of the document file.
	datedown	links are arranged in chronological order (oldest first) according to the time stamp of the document file.
	<datetime>	See above explanation.
	<summary>	See above explanation.
	<exclude>	See above explanation.
	<recurse>	This specifies whether the list should include documents from only the current folder, or from the current folder and all sub-folders leading from the current folder to the bottom of the file structure tree
	yes	include documents from the current folder and all it's sub folders.
	no	include documents from only the current folder.
	<select>	This specifies whether particular documents should be included in the list based upon their date stamps.
	all	include all documents, regardless of date stamp.
	olderthandays=n	include only documents whose date stamp indicates they are more than n days old, when compared with the system date.
	newerthandays=n	include only documents whose date stamp indicates they are less than n days old, when compared with the system date.
	eldestdocs=n	include only the n documents with the eldest date stamps
	newestdocs=n	include only the n documents with the newest date stamps
!!ExtraPageLinks <link> <dir> <(text=url)> <check>!!		
Inserts HTML code representing a single link to a specific URL either internal or external to the web site.	<link>	See above explanation.
	<dir>	See above explanation.

	<(text=url)>	This specifies the actual URL and, optionally, the text which should represent it in a textual link. text should be replaced by the text for the link (if used) url should be replaced by either : <ul style="list-style-type: none">the fully-qualified URL for the external page : http://www.bt.comthe name of an additional template file in the web site : whatsnew.tpl If a template file is specified, it is assumed to reside in the current folder unless a tilde is placed before the name (eg. ~whatsnew.tpl), in which case it is assumed to reside in the root directory of the web site.	
	<check>	This specifies whether the plugin should check whether the URL exists before including it	
	yes	Only insert the HTML code if the external link or the template file exists	
	no	Insert the HTML code for the link regardless	
!!Feedback!!			
Inserts a link to the email address of the web site's author, as optionally specified in an .ini configuration file.	(takes no parameters)		
!!HomeLink <link> <dir>!!			
Inserts HTML code representing a link to the menu (node) URL for the home page of the site, at the root of the file structure.	<link>	See above explanation.	
	<dir>	See above explanation.	
!!ParentLink <link> <dir>!!			
Inserts HTML code representing a link to the menu (node) URL for the parent folder of the current folder.	<link>	See above explanation.	
	<dir>	See above explanation.	
!!Preload <text> ... !!			
Inserts a comma-separated list of files from the current folder, with each file enclosed in single quotes. This is normally used to assist pre-loading of images by JavaScript code.	<text>	All files containing this segment of text within their names will be included in the list. Any number of text segments can be included as parameters.	
!!Title <type>!!			
Inserts text corresponding to the title of the current folder or document (without extension).	<type>	This specifies which title to include.	
	node	include the name of the current folder (node)	

	document	include the name of the current document file (only in a document template)
--	----------	---

A process for creating HTML from a template containing plugins is illustrated in Figure 11. When a template is being parsed at step S2.11 and found to contain a plugin, at step S2.12, then the entire reference to the plugin is replaced, including the exclamation marks, by new HTML that corresponds to the function defined by the plugin, at step S2.13, according to the rules set out in Table 1.

A process for handling graphical file references will now be described with reference to Figure 12. If the template contains graphic file references, i.e. references to files with the suffix .gif or the like, a search is carried out for them at step S2.14. The search is initially carried out in the current folder and if not located, the search moves up one level in the hierarchical folder structure. This search process is repeatedly carried out at higher levels until the corresponding file is found, as illustrated by step S2.15. At step S2.16, the graphic is inserted into the web page. For example, considering the Home page shown in Figure 7, the HTML template `lemon.tpl` given above includes reference to "Logo.gif". This file is included in the "Lemon Source" folder 33 and results in the image 54 being included in the Home Page shown in Figure 7. If any of the node templates refer to "Logo.gif" then the file is located and inserted into the corresponding HTML for the node according to the process shown in Figure 12.

Also the plugin `!!DocumentImage!!` can be used to import a graphical file into HTML produced by a template. When used in a within a node template, this plugin will insert a reference to an image which has the same name as the current folder. By way of example, referring to Figure 6, the plugin `!!DocumentImage!!` is used in the template `node.tpl` with the result that the file "meals.gif" 48 which has the same name as the folder Meals 36 produces a corresponding image 48 in the displayed web page 49 shown in Figure 6. When used within a document template, for

example `document.tpl` above, the plugin `!!DocumentImage!!` will insert a reference to an image which has the same name as the current document.

As previously described, the document template `document.tpl` produces individual web pages for documents held within the folder. The plugin `!!DocumentFile (parameter list)!!` specified in Table 1 is configured to take the text of a particular document file and insert it into the web page, replacing the plugin reference in the template. Use of this plugin can be seen in the example of HTML for the template `document.tpl` given above. When the plugin `!!DocumentFile(parameterlist)!!` is included in a document template, an HTML web page can be produced with the format of the template and the content of the document file. This process is illustrated in Figure 13, which can be considered as a more detailed discussion of steps S2.8 and S2.9 shown in Figure 10.

Thus, at step S2.9.1, where a document template is located that contains the plugin `!!DocumentFile(parameterlist)!!`, a corresponding document text file is fetched at step S2.9.2. The document is checked at step S2.9.3 to see whether it contains HTML tags already. If so, the file is inserted together with its HTML tags in its entirety in the location of the plugin in the template, at step S2.9.4. However, if the document file contains text which has not already been marked up e.g. a `.txt` file, suitable HTML paragraph formatting is inserted at step S2.9.5.

As can be seen from Table 1, some plugins are capable of creating the HTML representing a list of items such as hyperlinks to documents (in the case of `!!DocumentLinks(parameterlist)!!`).

Links and link templates

As can be seen from Table 1, the parameter `<link>` is used in a number of the plugins. This enables hyperlinks to be set up between the web pages according to the hierarchical file structure, by using appropriate plugins as per Table 1 in the aforementioned templates. Thus, for example the plugins `!!Homelink!!`, `!!CousinLinks!!`, `!!Parentlink!!` and `!!Childlinks!!` as shown in Table 1 can be used for example as shown in the HTML for the templates `lemon.tpl` and `node.tpl`

described above to provide corresponding hyperlinks between pages of the web site in accordance with the hierarchical file and folder structure. In order to provide programming flexibility, fragments of HTML referred to herein as "link templates" can be used to extensively format the specific information provided by the plugins.

5 Considering for example a plugin which defines a hyperlink, such as the plugin `!!Childlinks<link><dir>!!` shown in Table 1, the link parameter `<link>` allows particular text or and/or an image to be associated with the link as displayed in the resulting web page. In this example, the link templates are stored as files containing HTML fragments, with the suffix `.lpl` and contain instructions that insert the
10 specific information within the fragment, which is then inserted in the web page by the plugin.

Table 1 shows that the link parameter can be in a number of standard forms - the link template allows further flexibility, as described above.

15

Figure 14 illustrates how the link templates are used to generate HTML. When processing a node or document template, and a plugin with the link parameter is parsed, the link parameter is checked at step S2.17 to determine whether it is in one of the standard forms specified in Table 1. If so, HTML corresponding to the link
20 is formatted according to the standard formats listed in Table 1, e.g. plain, image, table or table with images. This is shown at step S2.18. The corresponding HTML code is outputted at step S2.19.

If, however, a link template is detected at step S2.17, a search is made in the
25 corresponding folder of the hierarchical file structure for the link template at step S2.20. If the link template is not found, the search is carried out at the next level up in the hierarchical folder structure at step S2.21 and the process is repeated at successive higher levels of the structure until the relevant link template is found.

30 Then, at step S2.22, the link template is examined to determine the specified URL text and image to be associated therewith. At step S2.23, the specific information such as URL, image and appropriate text are inserted into the link template, which

in turn is inserted into the relevant plugin so as to produce HTML code as shown at step S2.24.

Comment files .cmt

5 As shown in Table 1, the templates may include a plugin entitled **!!Comment!!** which is used to insert text into the web pages. The plugin is used to incorporate text from files with a suffix .cmt. The plugin has a different effect for node templates and document templates. When used in a node template, the plugin inserts the contents of all files with the suffix .cmt which do not have the same
10 names as document files in the relevant folder. An example of given in Figure 5. The open "Meals" folder 38 includes a comment file entitled **Meals.cmt** 47. The name of this file is thus different from the names of the other text files in the folder, namely files 43 – 46. The plugin **!!Comment!!** in the template file **node.tpl** given above is operative to take the text from the file **Meals.cmt** and insert it at a
15 predetermined location in the HTML corresponding to the node page for the folder Meals 38. This is shown in Figure 6 and the text from the file **Meals.cmt** 47 is shown at location 47 in Figure 6.

The plugin **!!Comment!!** is used in a different way in document templates. When
20 used in a document template, the plugin will insert the contents of a single .cmt file with the same name as the document. This enables comment files to add text to a document in a web page corresponding to the document file.

Running conversion program – step S2

25 Figure 15 shows the process of running the conversion program in more detail. At step S2.25, the source folder for the hierarchical folder structure is specified. In this example, the source folder comprises root folder 33 "Lemon Source" shown in Figure 5.

30 At step S2.26 the destination folder for the web site is specified. As previously explained, this can be at any suitable location either on the same computer or at a different location in the network. For example, the destination may be a folder at the server 3 shown in Figure 1.

At step S2.27, the user has the option of producing a local preview of the web site or uploading HTML for the web site to the specified server. The local preview option allows the user to check the web site before recompiling it for uploading to the specified server.

At step S2.28, the system checks to see which option was selected. If the local preview option is selected, the conversion program module is run at S.2.29 and HTML web pages and other associated hypermedia are produced corresponding to the hierarchical folder structure of Figure 5, as previously described, with the hyperlinks pointing to a predetermined local destination folder on the computer that allows a local preview with a web browser. If the user is not satisfied with the web pages, the configuration of the folder structure can readily be amended with the viewer 17 and the preview process repeated until the desired result is achieved.

Then, when ready, the hypermedia can be produced in a form that is suitable for uploading to the destination folder of the server. The option to upload to the server is then selected at S2.27, so that at step S2.30, the conversion program is run and the resulting HTML web pages and other associated hypermedia are produced corresponding to the hierarchical folder structure of Figure 5, with the hyperlinks pointing to the destination folder specified at step S2.26. The hypermedia is then uploaded to the server at step S3.1.

If the user is not fully satisfied with the configuration of the web site, the file viewer 17 can be re-opened and the files or their links can be easily edited. It will be appreciated that the hierarchy of the files can easily be changed using the standard editing functions provided with the file viewer 17. When the user is satisfied with the amendments made, the process of Figure 15 can be run again so that the changes can quickly and easily be incorporated into the HTML code for the web site.

The resulting web pages include hyperlinks, graphics and other information according to the files and templates included in the folder structure of Figure 5. As

previously explained, not all of the files will necessarily contain text. Some may contain spreadsheet and presentation files as may be created by Microsoft Excel and Powerpoint. These files need not necessarily be converted into HTML but may be uploaded in a link-only format so that the user can access them by way of
5 downloading the relevant files to a locally held copy of the application program so that the presentation program files or spreadsheets can be run locally as a download. However, the majority of web pages can be displayed using a conventional web browser 50 in the manner previously described.

10 Many modifications and variations will be evident to those skilled in the art. Whilst in the described example, the file viewer comprises Microsoft Windows Explorer, many different versions of file viewer could be used. For example, for earlier versions of Windows, File Manager may be used. Also, if the programs are handled in later versions of DOS, the well known DOSSHELL file viewer can be used. It
15 will be appreciated that operating systems other than Windows have their own proprietary file viewer systems, which can be similarly used in accordance with the invention.

Also, whilst the hypermedia has been described in relation to HTML, it will be
20 appreciated that other web markup languages can be used.

The conversion program module can be supplied to users on conventional storage media such as a floppy disc or CD ROM and also can be provided to customers as a download from a server e.g. through the Internet.

25

It will be appreciated that the invention is not restricted to wired network systems but can be used also with wireless, mobile networks, and run on mobile telephones and other mobile web hardware.

Claims

1. A method of creating hypermedia content for a web site, making use of a computer configuration that has an operating system wherein files are configurable
5 in a hierarchical structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, the method being characterised by using the viewer of the operating system to establish a hierarchical structure of files corresponding to content for the web site, and running a conversion program module to convert the file contents into
10 hypermedia for the web site with hyperlinks therein corresponding to the file structure.
2. A method according to claim 1 including using the viewer to transfer files of content for the web site from other file locations of the computer configuration,
15 into the hierarchical structure of files for the web site.
3. A method according to claim 1 or 2 wherein the computer configuration is operable to run a plurality of different application programs with individual file formats, and the hierarchical structure for the web site includes files in a plurality of
20 said different formats, the method including using the conversion program module to convert the files of the different formats into a form suitable for use as hypermedia on the web site.
4. A method according to any preceding claim wherein the hierarchical
25 structure includes a file folder, and at least one underlying layer containing at least one file sub-folder, and the conversion program module produces web pages corresponding to the folder and any subfolders with hyperlinks between them corresponding to the folder hierarchy.
- 30 5. A method according to claim 4 wherein the folder contains a template file defining a predetermined configuration for hypermedia at a node in the web site corresponding to the folder, and the conversion program module produces a web page corresponding to the template for the node.

6. A method according to claim 5 wherein the conversion program module produces a web page corresponding to the template for a node corresponding to the sub folder.

5 7. A method according to claim 5 wherein the conversion program module searches the subfolder to determine if it contains a template file defining a predetermined configuration for hypermedia at a node in the web site corresponding to the subfolder and the produces a web page corresponding to the
10 template for a node corresponding to the sub folder.

8. A method according to claim 7 wherein if no template file is found in the subfolder, the conversion program module searches said folder to find a template file to be applied to the subfolder.

15 9. A method according to any one of claims 5 to 8 wherein the template file includes a plugin for inserting predetermined hypermedia from different files into the web page produced by the template.

20 10. A method according to wherein the plugin defines a link and the conversion program module produces a hyperlink in the web page produced by means of the template with a configuration defined by the link.

25 11. A method according to any one of claims 4 to 10 wherein the folder or the subfolder contains a document template for defining a predetermined configuration for hypermedia at a web page in the web site corresponding to a text document in the folder or subfolder.

30 12. A method according to any one of claims 4 to 10 including providing a library of said templates and using the file viewer to transfer a selected one or more of the templates from the library to the one or more of the folders.

13. A method according to claim 12 wherein the folder structure includes a root folder and sub-folders depending therefrom, and including placing at least one of the templates in the root folder.

14. A method according to any preceding claim wherein the computer configuration comprises a network and including arranging the files in the hierarchical structure for the web site, using the file viewer, from different file locations in the network.

15. A method according to any preceding claim including uploading the hypermedia for installation on a server for the web site.

16. A method according to claim 15 including providing a local preview of the hypermedia before uploading it to the server.

17. A method according to any preceding claim including causing the conversion program module to be downloaded to the computer configuration from a remote server.

18. A computer configuration for creating hypermedia content for a web site, the configuration that having an operating system wherein files are configurable in a hierarchical structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, characterised by a conversion program module operable to convert a hierarchical configuration of files corresponding to content for the web site previously assembled in the operating system using the viewer, into hypermedia for the web site with hyperlinks therein corresponding to the file structure.

19. A conversion program module operable to create hypermedia content for a web site, by running on a computer configuration that has an operating system wherein files are selectively configurable in a hierarchical structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, characterised by the

module being operable to convert a hierarchical configuration of files corresponding to content for the web site previously assembled in the operating system using the viewer, into hypermedia for the web site with hyperlinks therein corresponding to the file structure.


5
20. A program module according to claim 17 recorded on a recording medium insertable into the computer configuration to be loaded therein.

10 21. A program module according to claim 17 configured as a download to be downloaded from a server to the computer configuration.

22. A template library including a plurality of templates configured for use in a method of creating hypermedia content for a web site, the method making use of a computer configuration that has an operating system wherein files are configurable
15 in a hierarchical structure and the operating system is provided with a viewer that provides a visual display of the hierarchical structure and an indication of the file content, the method including using the viewer of the operating system to establish a hierarchical structure of files corresponding to content for the web site, and running a conversion program module to convert the file contents into hypermedia
20 for the web site with hyperlinks therein corresponding to the file structure wherein the folder contains at least one template file from said library defining a predetermined configuration for hypermedia at a node in the web site corresponding to the folder, and the conversion program module produces a web page corresponding to the template for the node.

25

Fig.1.

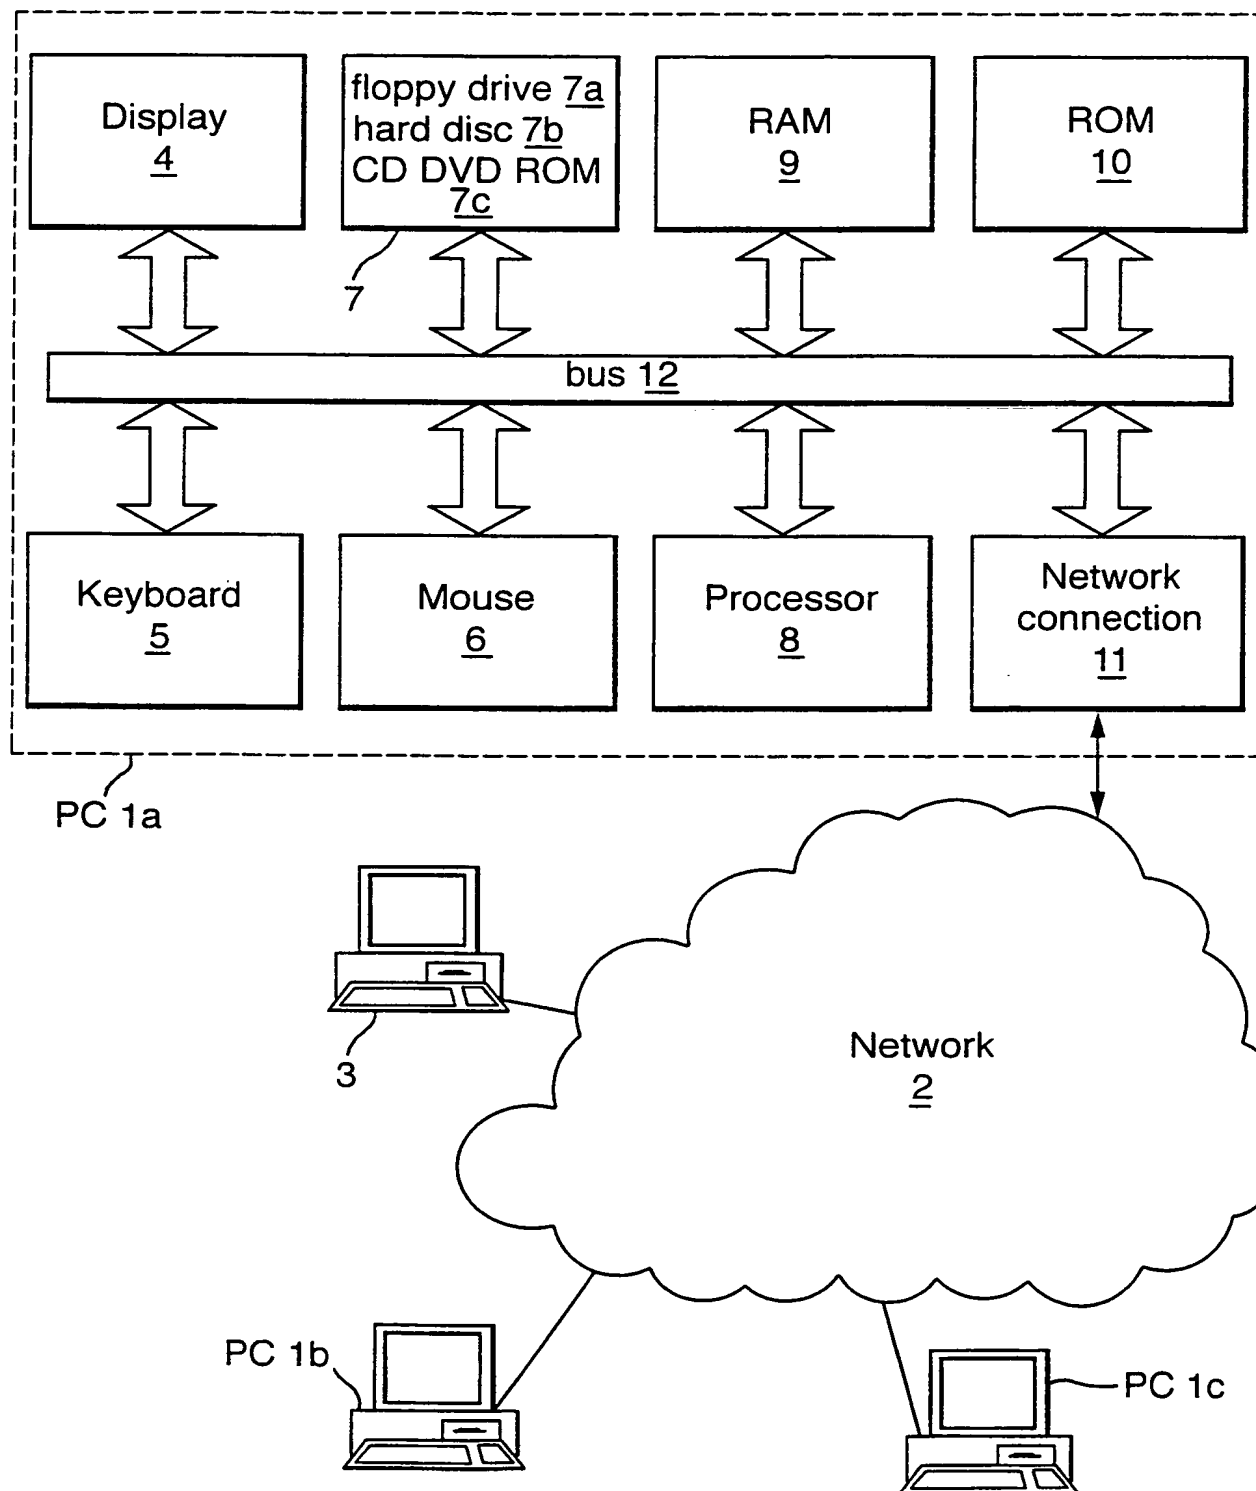

2/9

Fig.2.


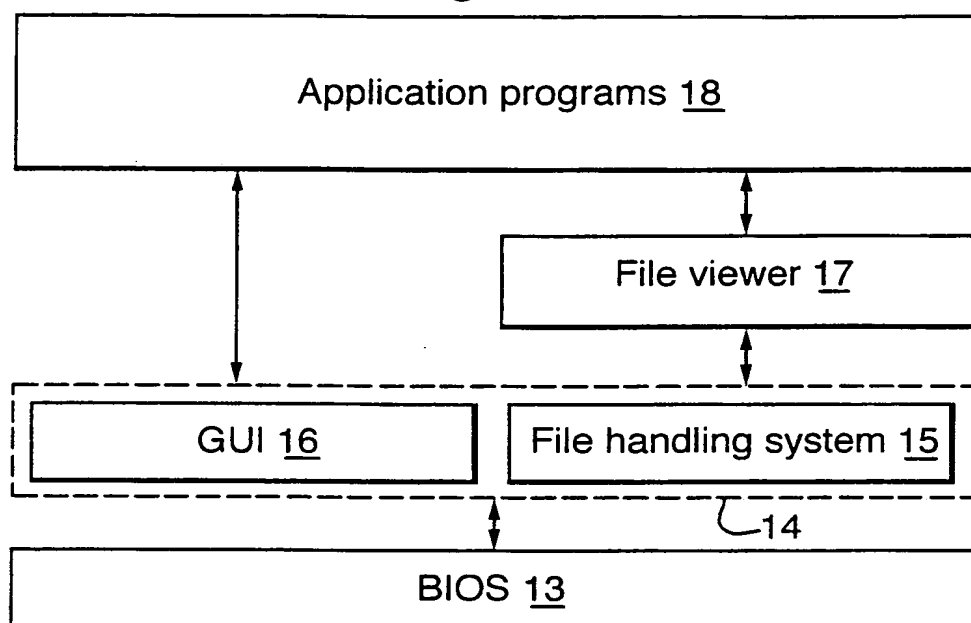


Fig.3.

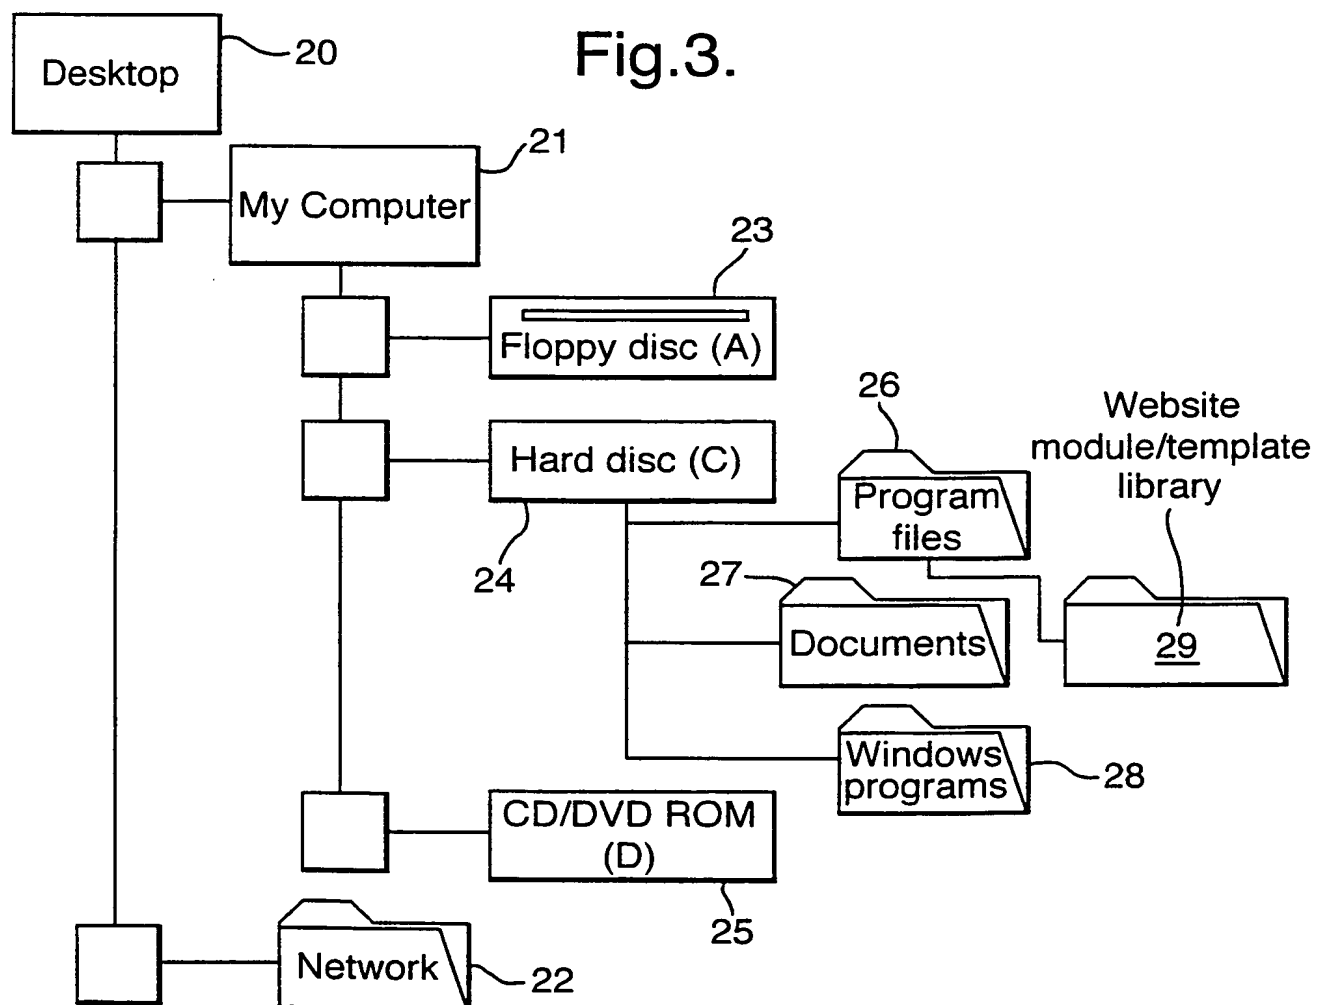

3/9

Fig.4.

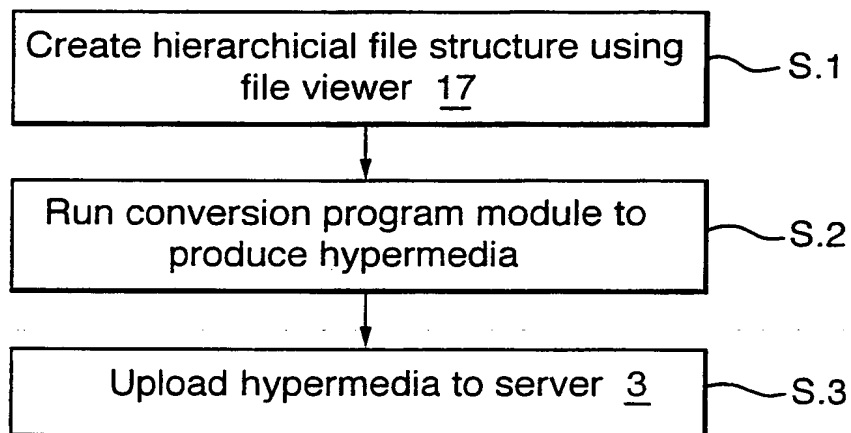


Fig.5.

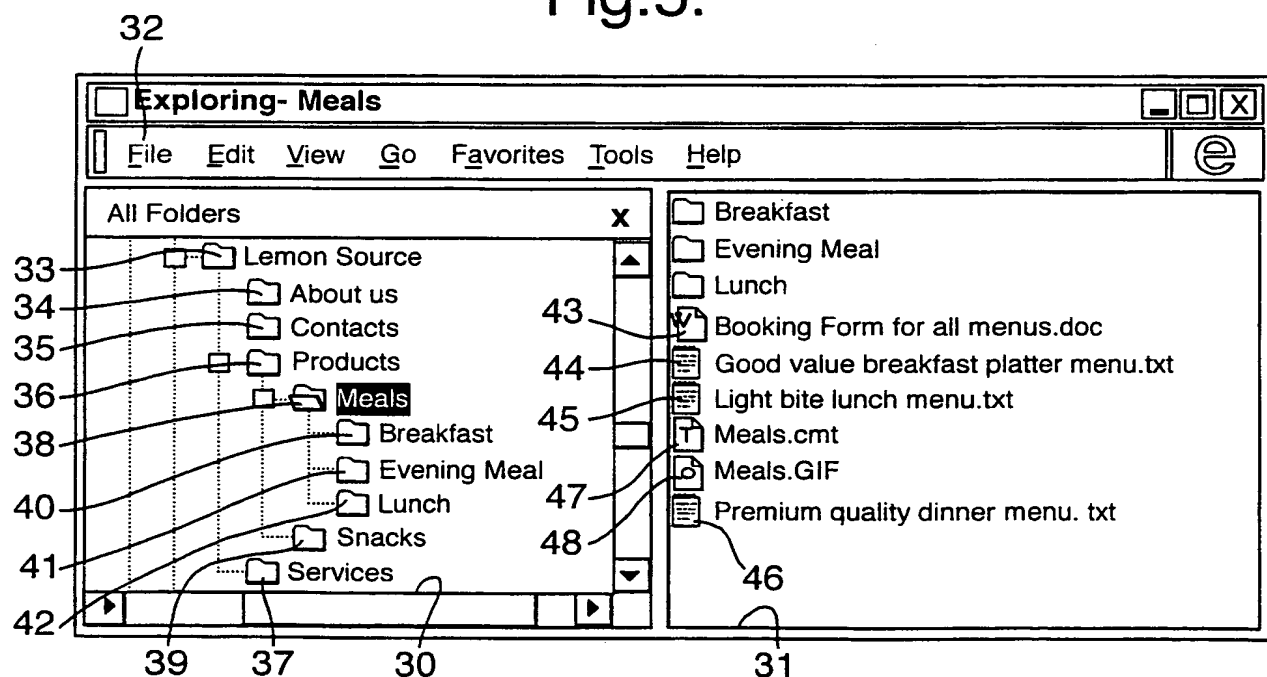


Fig.6.

4/9


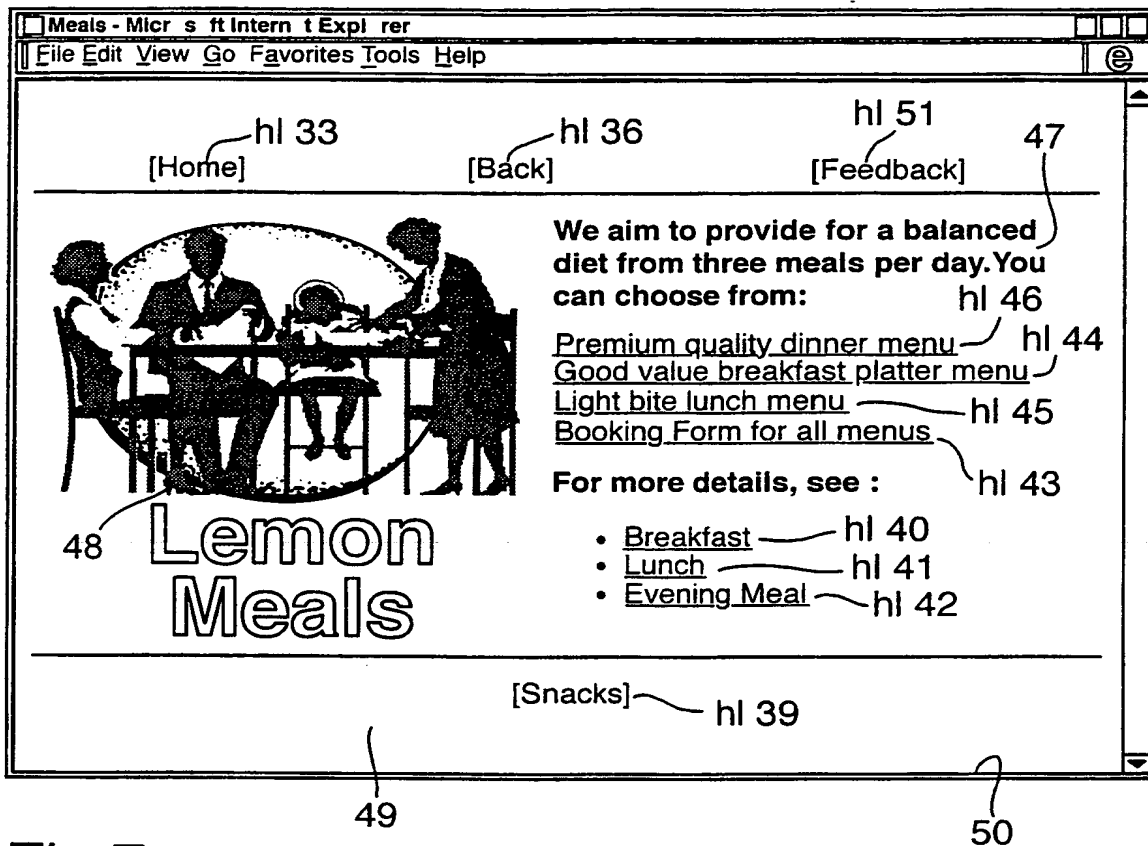


Fig.7.

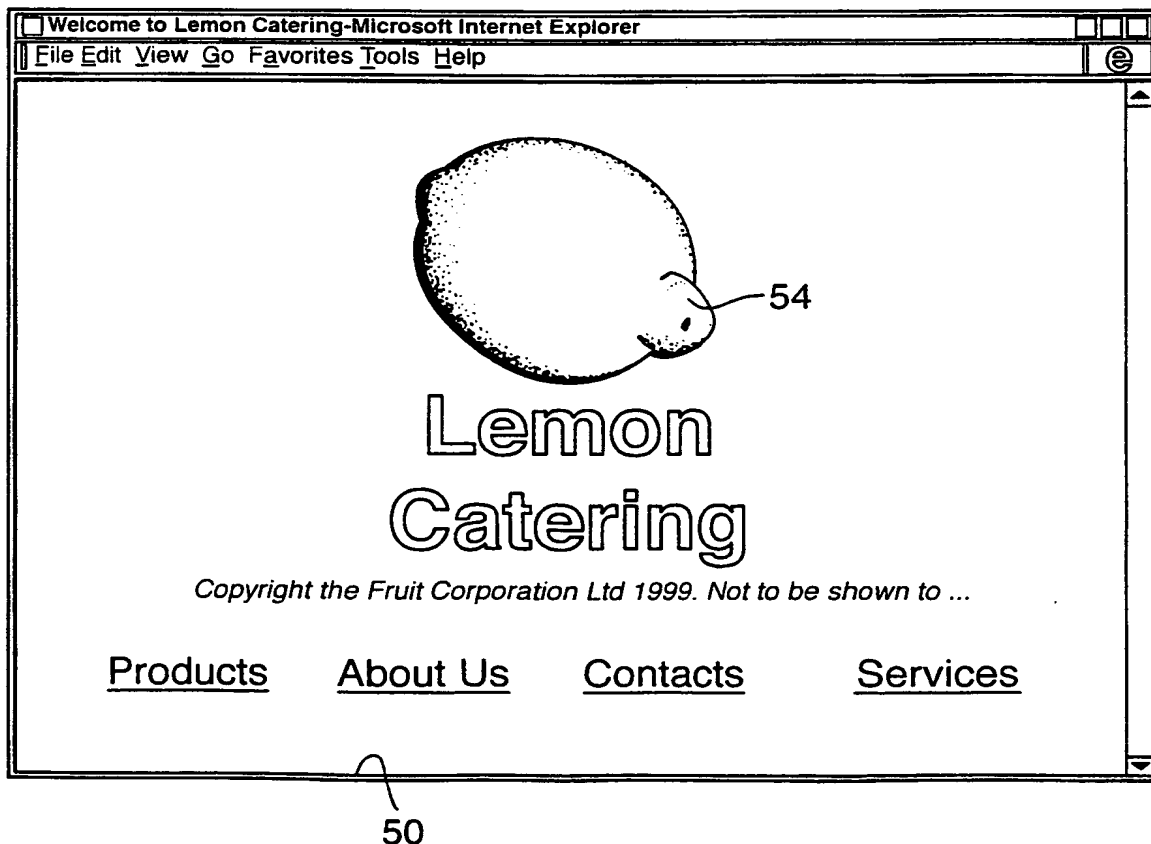

5/9

Fig.8.


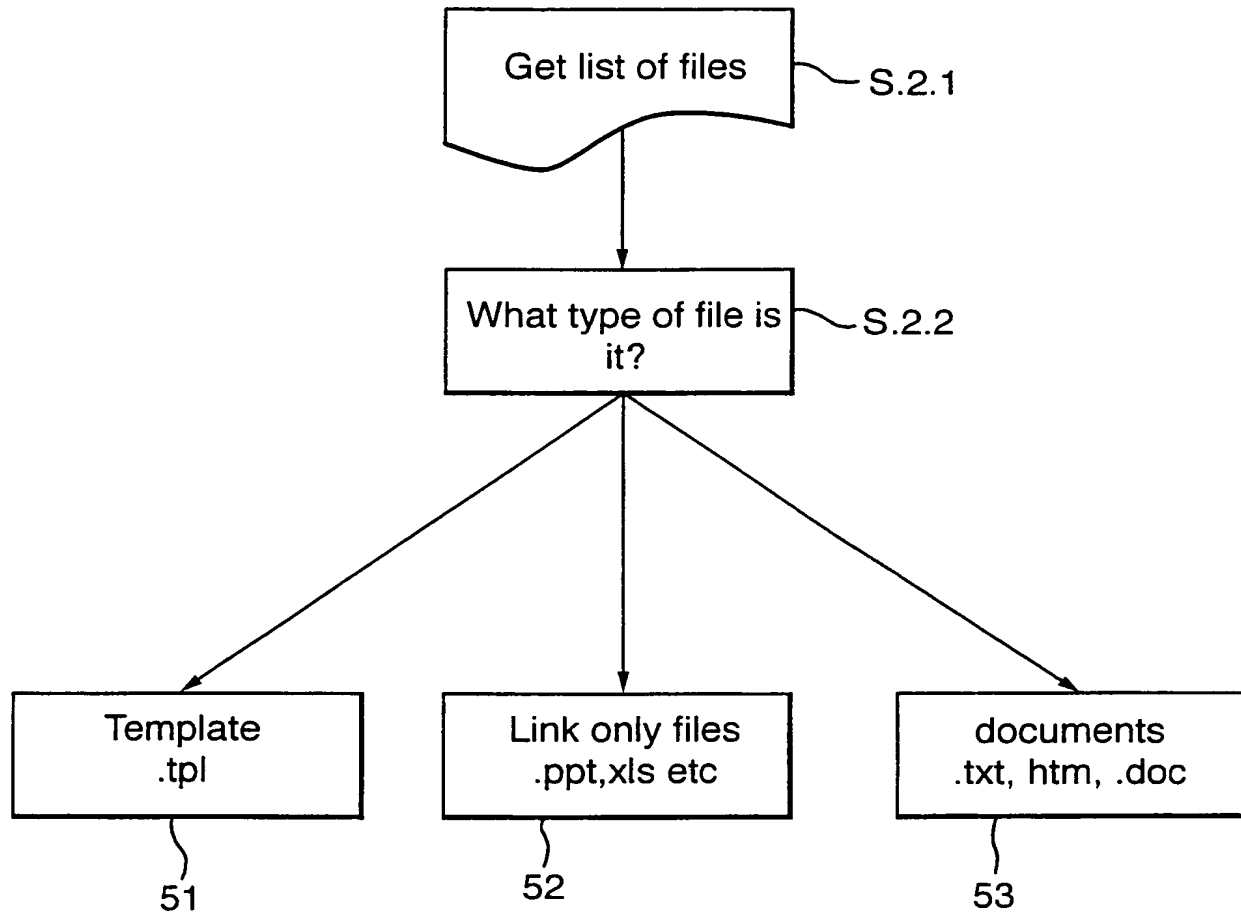


Fig.9.

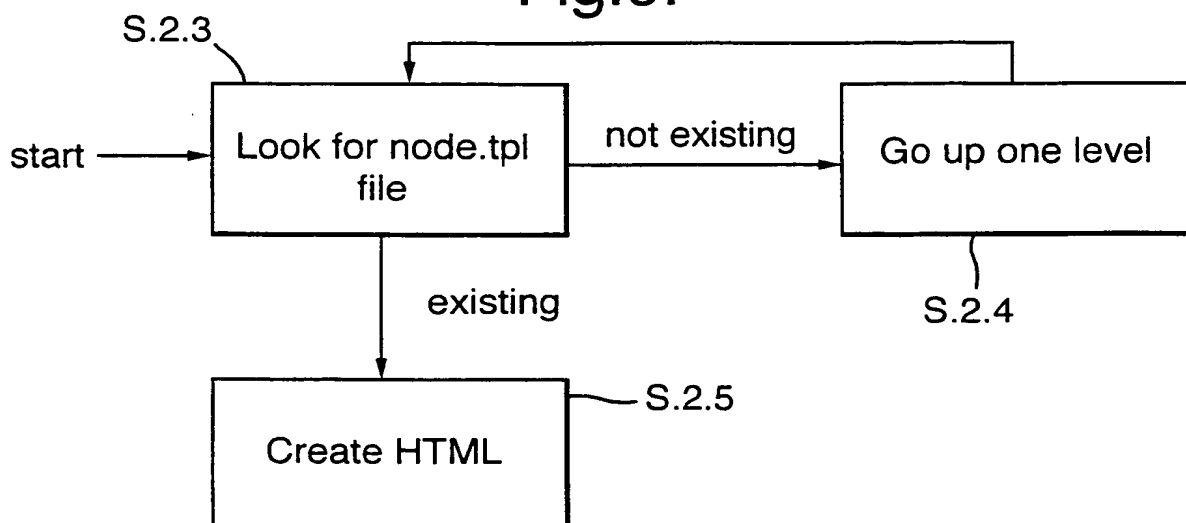

6/9

Fig.10.


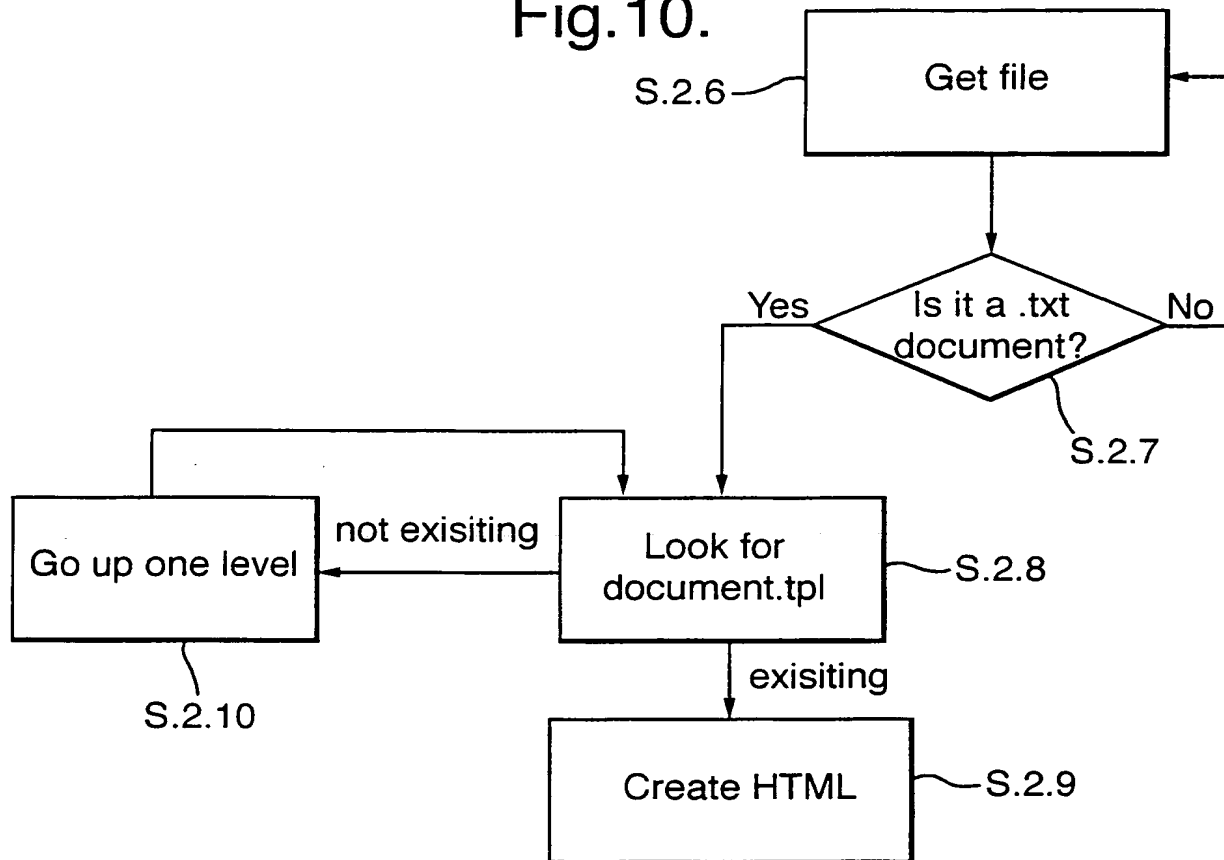


Fig.11.

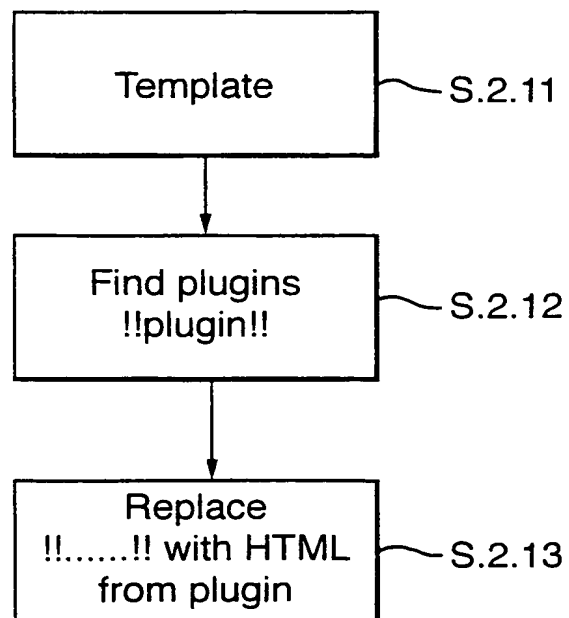

7/9

Fig.12.



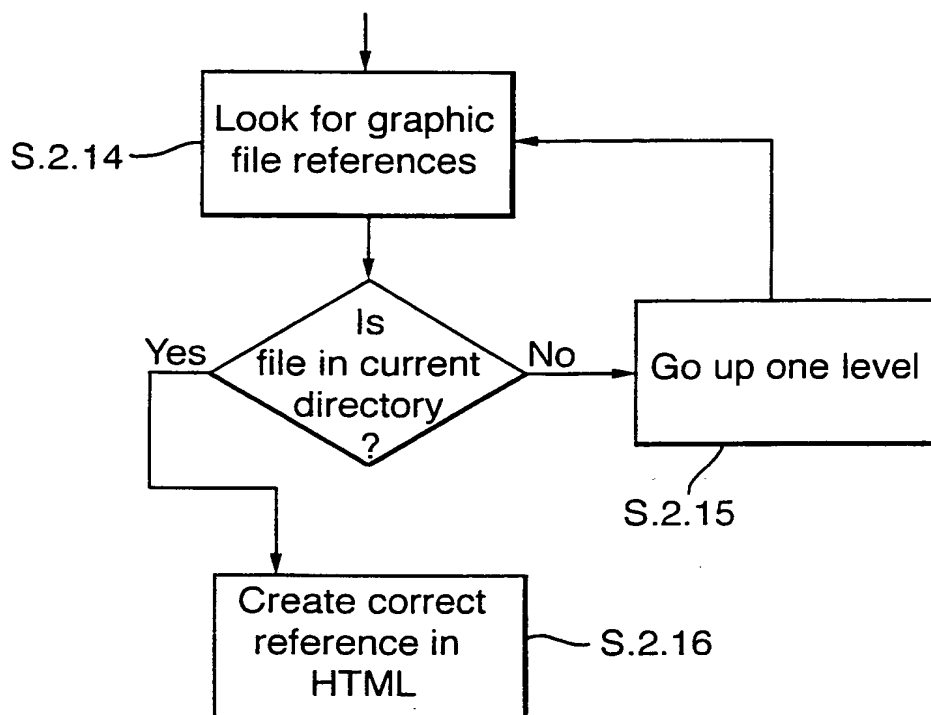


Fig.13.

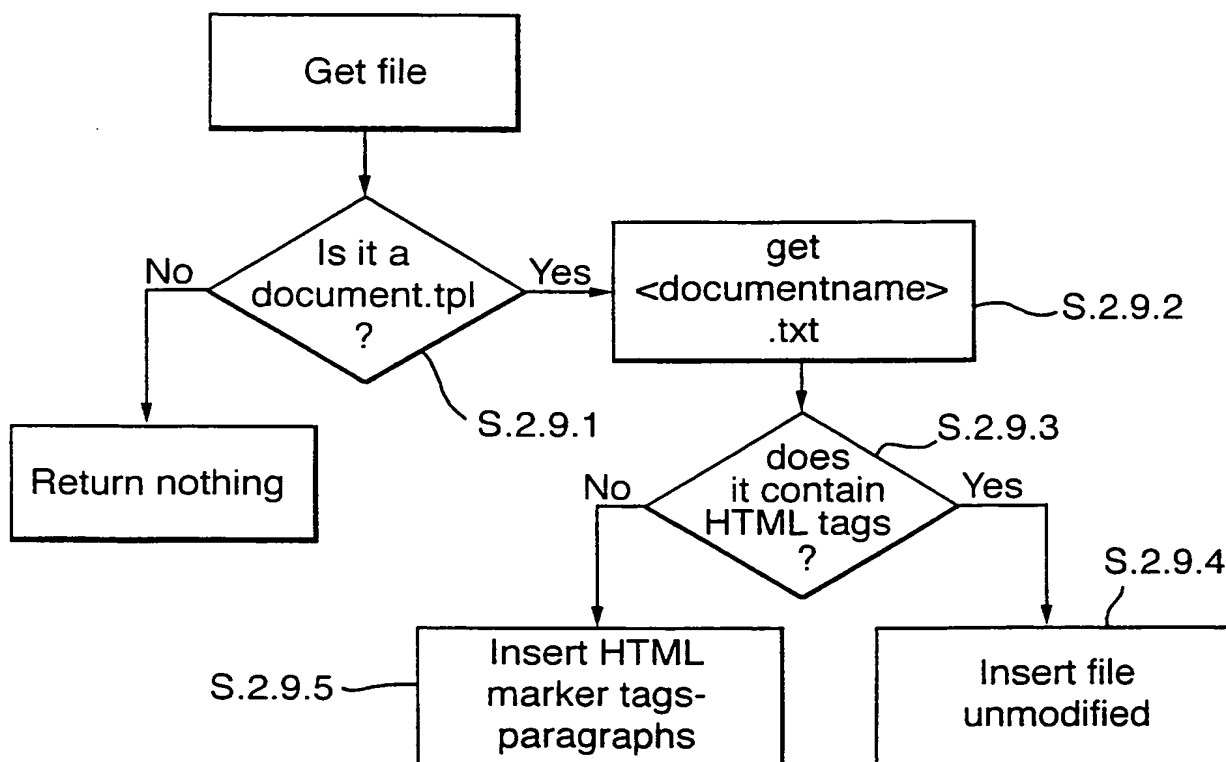


8/9

Fig.14.

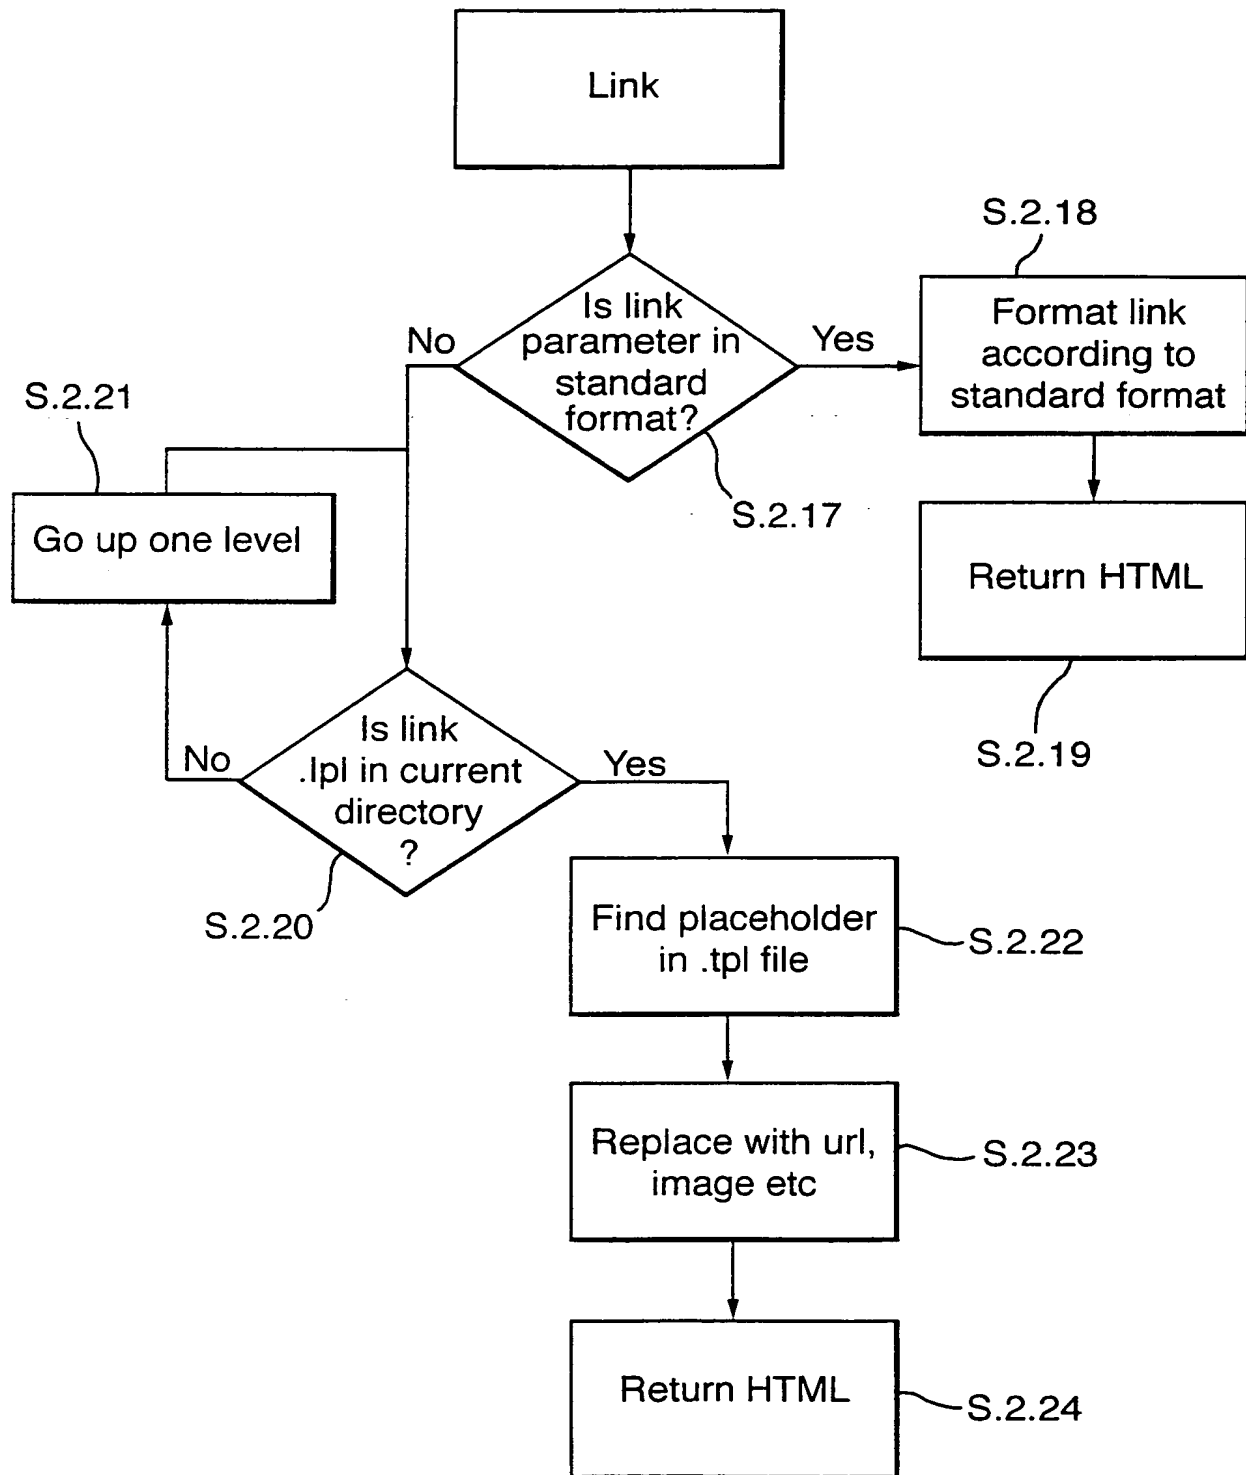

9/9

Fig.15.

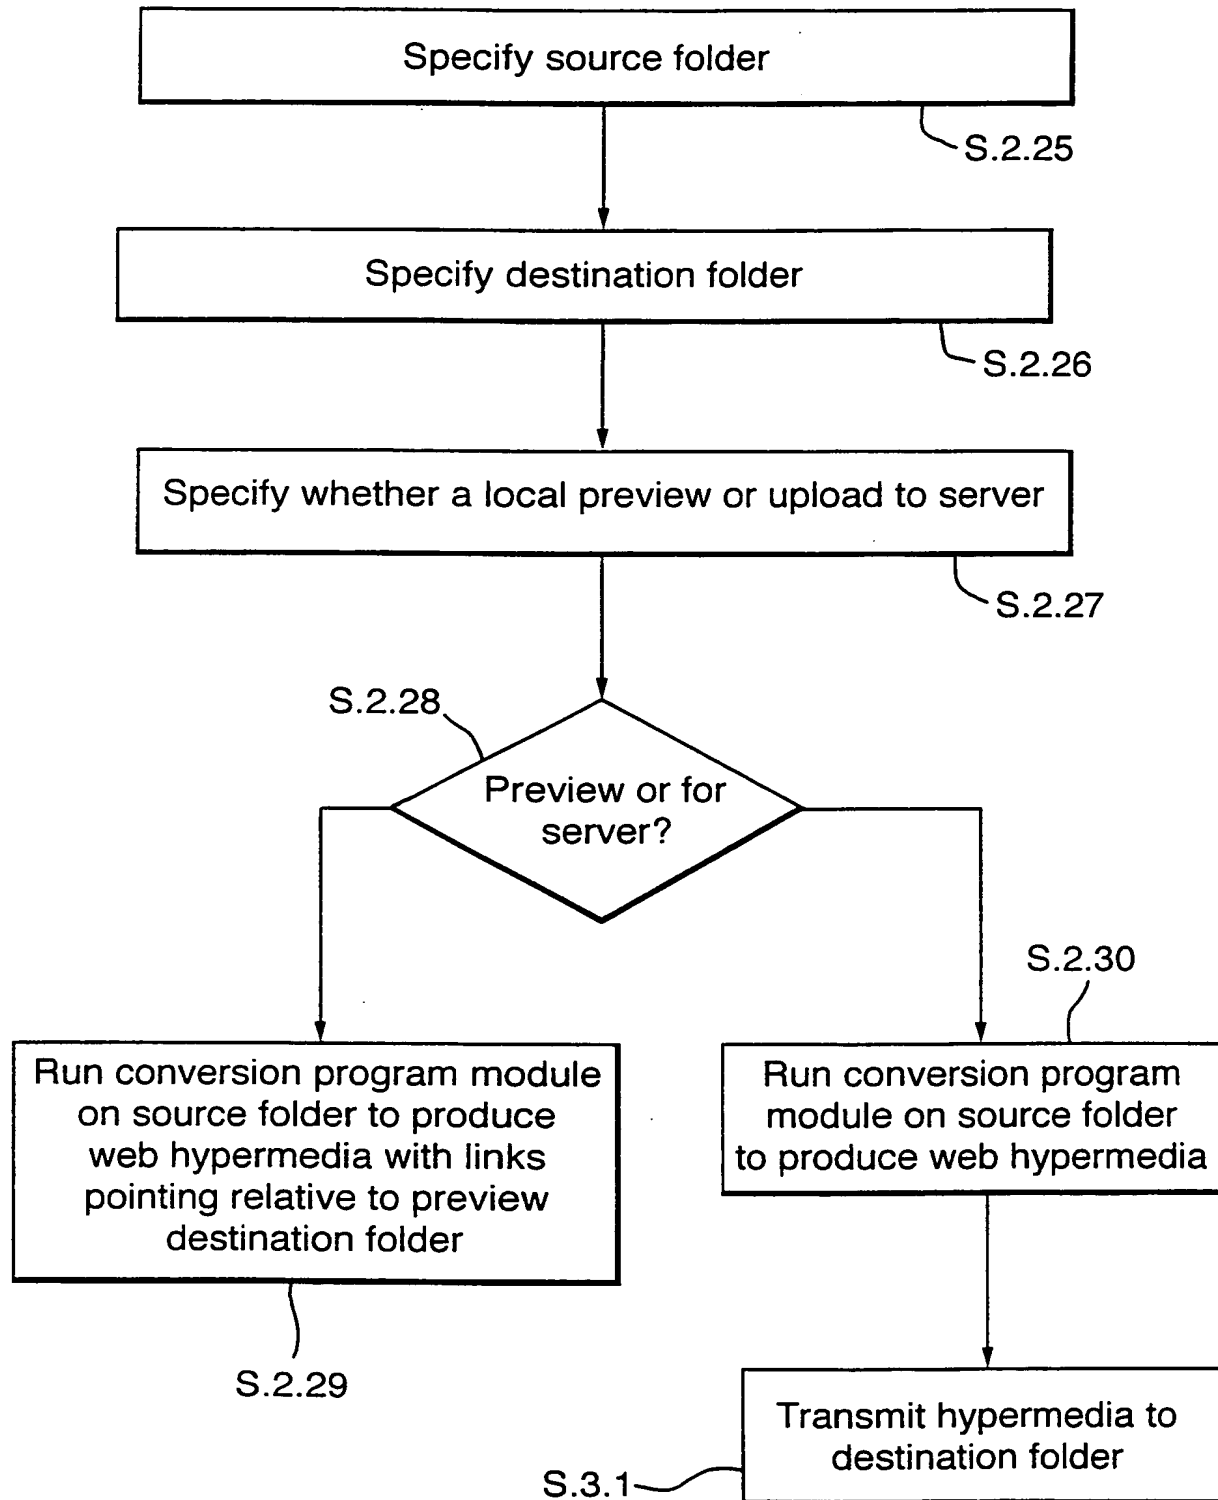

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00548

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G06F17/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 98 10356 A (DESIGN INTELLIGENCE INC) 12 March 1998 (1998-03-12) page 9, line 18 -page 13, line 5 page 25, line 34 -page 29, line 16 page 64, line 8 -page 66, line 28 figure 38	1-4, 14-21 5-13,22
A	BLYTH D. S: "WEB PAGE DESIGN FOR HTML" INTERNATIONAL PROFESSIONAL COMMUNICATION CONFERENCE (IPCC), US, NEW YORK, IEEE, 1996, pages 89-103, XP000691597 ISBN: 0-7803-3690-9 page 89-103	1-22
P, X	US 5 956 736 A (HANSON MICHAEL ROBERT ET AL) 21 September 1999 (1999-09-21) column 5, line 37 -column 9, line 61	1-22



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search

28 March 2000

Date of mailing of the international search report

05/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Bowler, A

INTERNATIONAL SEARCH REPORT

information on patent family members

Int. Application No

PCT/GB 00/00548

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9810356	A	12-03-1998	US	5956737 A	21-09-1999
			US	5895476 A	20-04-1999
			US	5903902 A	11-05-1999
			US	5895477 A	20-04-1999
			AU	4334197 A	26-03-1998
			EP	0925542 A	30-06-1999
<hr/>					
US 5956736	A	21-09-1999	NONE		
<hr/>					